



QUALITY
THROUGH
PRECISION

2024 CATALOG

VECTOR OPTICS®

QUALITY THROUGH PRECISION

Vector Optics Has Provided Premium Optics And Innovative Sighting System For More Than 15 Years.

We Design, Build, And Test Our Scopes & Red Dot Sights For Rifles And Pistols To Be Used In All Fields Of Applications For Hunting, Defense, Sporting & Competition.

We Build Our Products Beyond Expectations. We Provide Precision Aiming Solutions And Perfect Shots Over Short, Medium, And Long Range Shooting.

Our Products Are Implemented In Various Applications From Recreational Shooters To Critical Users Such As Sporting Marksmen, Avid Hunters, And Tactical Elites In Arctic Cold, Desert Heat, And All In Environments That Can-And-Will.

Vector Optics Will Accompany Your Every Shot And Be Your Loyal Partner!



Your Vector Optics Continental, Taurus, Paragon, Scrapper, And Frenzy Line Products Are Covered By Our Tailed VIP Lifetime Warranty. We, Will, At Our Option, Either Repair Or Replace Your Vector Optics Product Without Any Cost If It Is Damaged Or Defective. If We Can't Repair Your Damaged Product, We Will Replace It With A Brand New One In Perfect Condition. We Proudly Stand Behind All Our Vector Optics Products With This Warranty. You Have Our Word That We Will Do What It Takes To Retain Your Bussiness As A Satisfied Customer. You Can Count On Our T-VIP Lifetime Warranty.

Unlimited Full Lifetime Warranty:

- ① Reply To You In 1 Working Day.
- ② Free Repair Or Replacement.
- ③ Fully Transferable.
- ④ No Invoice Or Receipt Is Needed.
- ⑤ No Question Asked, However, We Do Appreciate Your Feedback.
- ⑥ We Pay For Shipping Back To You.



This Warranty Does Not Cover Product Loss, Theft, Deliberate Damage, Abuse, Misapplication, Or Modification. This Warranty Does Not Apply To The Electronic Components Or Batteries.

For Warranty Service Please Get In Touch With Our Customer Service Department Online At service@vectoroptics.com For Return Instructions. If You Need To Return The Product, Please Ensure The Shipment And Keep The Tracking Records.

All Other Vector Optics Products Are Covered By The 5-Year Warranty. Your Vector Optics Product Is Warranted Free Of Defects In Materials And Workmanship For A Period Of 5 Years From the Time Of Purchase By The Original Purchaser. This Warranty Covers Accidental Damage, As Well As Any Defects In Materials And Workmanship. In The Event Defect Under This Warranty, We Promise To Repair Or Replace Your Products And Ship Them Back To You Free Of Charge Warranty Card Needs To Be Filled Out. Contact Us Via service@vectoroptics.com, Our Online Store, Or Facebook To Get After-Sales Service.



Please Note That Batteries, Damages Caused By Misuse, Or improper Handling Are Not Covered. Also, This Warranty Is Null And Void If Modification Or Maintenance Is Provided By Someone Other Than Vector.

VISIT US ON



VectorOptics



VictOptics



Owlset



2	About VectorOptics
3	Warranty
4	Visit Us

RIFLESCOPES

Top Line

12	 Continental
----	---

Premium Line

24	 Taurus
----	--

28	 Paragon
----	---

Classic Line

34	 Veyron
----	--

36	 Orion
----	---

38	 Hugo
----	--

49	 Mustang
----	---

50	 Forester
----	--

52	 Sentinel
----	--

54	 Grizzly
----	---

RED DOTS

58	 Frenzy
----	--

68	 Scrapper
----	--

72	 Nautilus
----	--

73	 Centurion
----	---

76	 Maverick
----	--

80	 Omega
----	---

OTHER OPTICS

84	Magnifier
----	-----------

VICTOPTICS

96	Riflescope
----	------------

104	Red Dots
-----	----------

107	Binocular
-----	-----------

107	Spotting Scope
-----	----------------

107	Range Finder
-----	--------------

107	Scope Collimator Instrument
-----	-----------------------------

GUNFANY

114	 Rokstad
-----	---

118	 Vaide
-----	---

120	 ViperRay
-----	--

124	 X-ACCU
-----	--

134	 Vekt Defense
-----	--

136	 Owlset
-----	--

TABLE OF CONTENTS

40	 Minotaur
----	--

42	 Constantine
----	---

44	 Matiz
----	---

Entry Line

48	 Grimlock
----	--

86	Spotting Scope
----	----------------

88	Range Finder
----	--------------

89	Monocular
----	-----------

90	Binocular
----	-----------

SCOPE OPTICS FEATURES

N2

Nitrogen Purged

Nitrogen is used to fill the optics, preventing internal fogging, moisture, and mildew formation. This ensures that the optical lenses are fog-proof and water-proof.



IP67 Water Proof

Dustproof and water-resistant, can be submerged in water up to 1 meter deep for 30 minutes.



IPX4 Water Resistance

IPX4 can withstand water splashing from any direction, providing protection against light rain or water splashes.

**30
MM**

Tube Size

The diameter of the scope tube.




Extra Short Size

The compact size of riflescopes that are typically used for small gears or gears with limited installation space.




Shockproof - Built to Endure

Shock tested to 1000g and constructed with durable materials & resistant coatings to ensure internal components are not damaged by recoil.

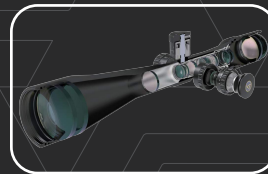


SCOPE BODY

OBJECTIVE LENS

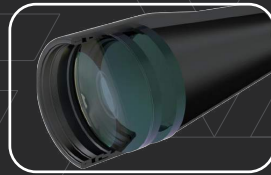

Multi-Coated

More protection and durability.



ED GLASS

ED glass corrects chromatic aberration. It enhances sharpness and contrast, even at high magnification.



Fully Multi-Coated

It enhances the clarity, brightness, and sharpness of the images.



Light Transmission

The amount of light that can pass through the lens. It is important for the brightness of the image through a riflescope.



VePRO™ FMC

Vector Optics Premium Reliable Optoelectronic FMC, all VePRO™ lenses are state-of-the-art coatings crafted in-house, providing excellent anti-reflection broadband FMC.




HD Glass

High-Density glass that provides enhanced clarity, sharpness, and color accuracy for improved visual performance while aiming and shooting.



LaREE Lens

Adopt lens made from Lanthanide Rare Earth Element optical glasses by cold forming. It features high refraction index and extra low Abbe number.

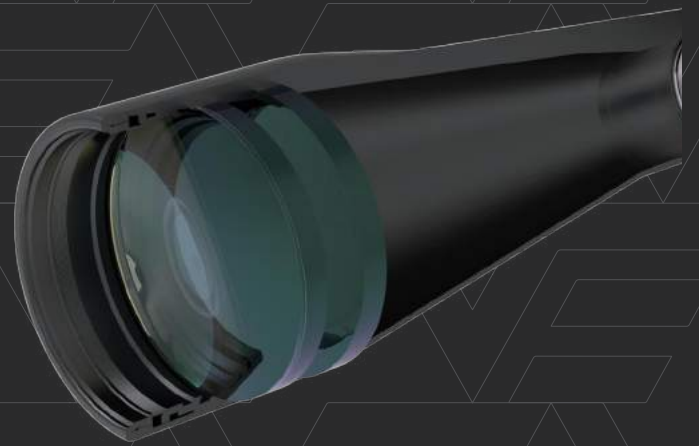



Turret Lock

A feature that securely holds the adjustment turrets in place to prevent unintentional changes.




Reset to Zero

Quickly Reset, Aim True with Reset to Zero.



Zero Stop

A feature in riflescopes that ensures quick and accurate return to their initial zero position without having to count clicks or make manual adjustments.

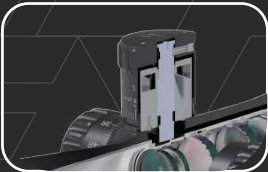

ADJUSTMENT



High Precision Adjustment

Making precise and accurate adjustments to the aim point ensures low tolerance of $\leq 2\%$. This allows for precise targeting and shot placement.




Audible Mechanical Clicks

The audible clicks produced when adjusting the scope's settings, allowing for precise and accurate adjustments during shooting.





Scope Revolution Indicator

A feature that indicates in which revolution the turret is in, mostly used for Zero Stop function.



7075-T6 Aluminum

The strongest aluminum alloy, increasing the strength and durability of the product itself without adding weight.

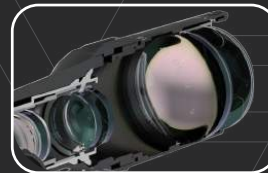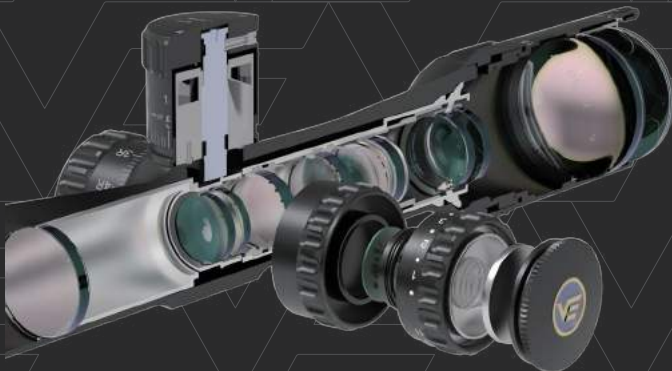

OCULAR LENS



Zoom Factor

Zoom into your target - Precision Guaranteed.




Target Long Range

More stable image when aiming; reducing visual fatigue and improving aiming comfort.



Edge-To-Edge Clarity

Equal (HD/ED) clarity and sharpness throughout the image from the center to the outer edges, without distortion.



Hunting Style & Tactical Style

Different design and functionality options for specific shooting purposes.



Large Eye-Box

More flexible head moving.



FFP & SFP

FFP means reticle in front of scope's erector system. SFP means reticle behind scope's erector system.



Long Eye Relief

Allow users to maintain a comfortable distance from the ocular while still being able to see the entire field of view.




SIDE FOCUS & ILLUMINATION



Parallax Correction

Parallax correction means that the adjustment made to align the reticle with the target, eliminating any apparent movement caused by the viewer's eye position.



Side Parallax Correction

Adjusts the parallax of the scope to provide a clear view of the target when shooting at different distances. It can help improve accuracy and precision when shooting.



Illumination

Illumination improves reticle visibility in different light conditions, especially when light is limited.



Fiber Optic Illumination

Advanced visibility even in bright light conditions.

RED DOT OPTICS FEATURES

OBJECTIVE LENS



Multi-Coated

More protection and durability.



Parallax Free

At specific distance, the dot you see remains parallel to the barrel of your gear regardless of the angle of your eye in relation to the sight.




Auto Light Sensor Automatically

With adjust the intensity of the red dot according to the light and brightness of your environment.



Night Vision Dot

Low-intensity red dot compatible with night vision equipment, allowing for accurate aiming in dim light or nighttime conditions.

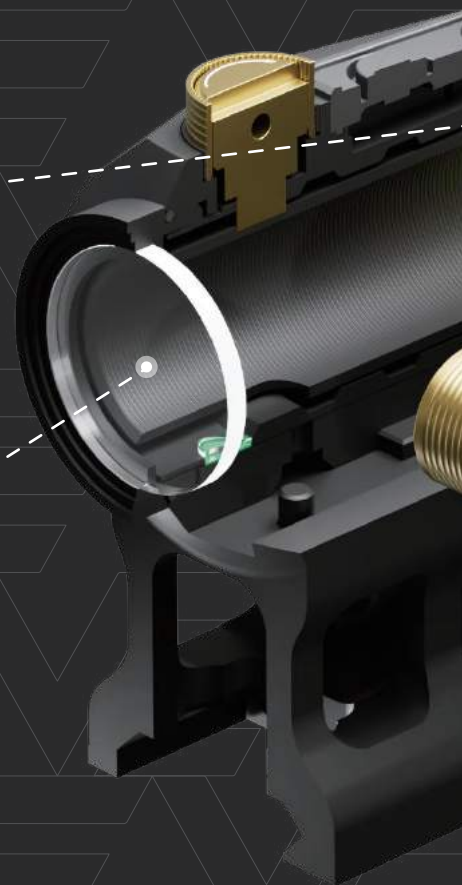

OCULAR LENS



1x With Both Eyes Open

1x enables both eyes open for an easier aiming.




Direct Bulb

Projects a mini light source directly onto the lens to form the red dot, with the size of the red dot determined by the size of the light bulb.



Dot Size

Dot size refers to the diameter of the illuminated dot reticle displayed in red dot sights, which is used for aiming and target acquisition.



Large Window

A Large Window with a wider viewing area, allowing for improved peripheral vision.



Digital Control

Digital control switch, can automatically power off. And digital user control is more efficient and more convenient.



Solar Power Engage

This is in contrast to traditional battery-powered sights, which can run out of power at inconvenient times.



SCOPE BODY

N2

Nitrogen Purged

The internal nitrogen filling of the scope prevents fogging, ensures waterproofness, and enhances optical clarity.

IP67

IP67 Water Proof

Dustproof and water-resistant, can be submerged in water up to 1 meter deep for 30 minutes.

IPX4

IPX4 Water Resistance

IPX4 can withstand water splashing from any direction, providing protection against light rain or water splashes.

750G

Shockproof - Built to Endure

Shock tested to 750g and constructed with durable materials & resistant coatings to ensure internal components are not damaged by recoil.

GRAM

Lightweight

Lighten your load, aim with ease.

Battery

Battery Side Loaded

The battery compartment is located on the side of the red dot sight.

Quick Release

Quick Release

Secure and fast attachment for your red dot sight.

ADJUSTMENT & FUNCTION



Audible Mechanical Clicks

The audible clicks produced when adjusting the scope's settings, allowing for precise and accurate adjustments during shooting.



Multi-Reticle

Customized multi reticle patterns according to your personal shooting preference, shooting style and target.



Motion Sensor

Save battery life by turning off illuminated reticles after a while of inactivity and quickly turning them back on when movement is detected.



Illumination

Illumination improves reticle visibility in different light conditions, especially when light is limited.

— TOP LINE —



TOP LINE

Lifetime Warranty



CONTINENTAL[®]



CONTINENTAL, our high-end riflescope, features a Professional-Grade Optical System, excelling in challenging lighting conditions and offering unmatched light transmission.

Designed for professional shooters, this line ensures superior quality and includes a lifetime warranty for your peace of mind. Experience top performance with our premier product.




Outstanding clear glass to see detail very well at long distances which makes it easy to identify targets or to see bullet impact. The turrets are the best features, they have a ton of adjustment, super crisp, very positive and very audible and with a Zero stop turret included.

Overall, from the ocular focus, zoom ring, turrets and side focus wheel there is No slop or play which makes this scope the best value for money.



The reticle comes with a ton of holdover indications and just the right thickness.

Marno Denner
South Africa

FEATURES

-  **HIGH PRECISION ADJUSTMENT**
-  **7075-T6 TURRET**
-  **VePRO FMC**
-  **LaREE LENS**
-  **90° LIGHT TRANSMISSION**
-  **LARGE EYE-BOX**
-  **ZERO STOP**
-  **TURRET LOCK**
-  **RESET TO ZERO**
-  **SCOPE REVOLUTION INDICATOR**
-  **IP67 WATER PROOF**
-  **1000G SHOCK PROOF**
-  **EDGE-TO-EDGE CLARITY**
-  **WITH RINGS**
-  **LENS COVER**
-  **TUBE SUNSHADE**

RETICLE PATTERN

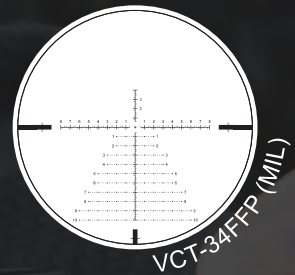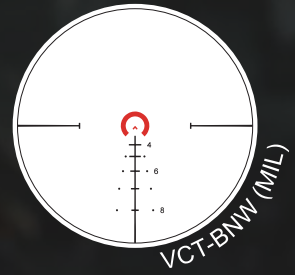

Power ring throw lever (SCCON-TL)



Parallax big side wheel genil (SCCON-SW2)



Metal flip-up cap

CONTINENTAL® 34MM

It delivers an unparalleled vision and extremely high volume adjustment range. Each of these models provides Zero Stop with a revolution counter system.

Robust, Relentless, Remarkable.



SKU	NAME	RETICLE	ILLUMINATION	EYE RELIEF (mm / in)	F.O.V. (m @100 Meters) (ft @100 Yds)	ADJUSTMENT RANGE	TUBE SIZE	LENGTH (mm / in)	WEIGHT (net)(g / oz)	CLICK VALUE	PARALLAX ADJUSTMENT
SCFF-31	1-6x28 FFP	VCT-BNW			40,8-6,8 112,5-20,4	45MIL(E) 20MIL(W)		296 / 11,7	550 / 19,4		100yds
SCFF-28		VCT-34FFP							820 / 28,9		
SCFF-43	3-18x50 FFP	VEC-MBR			13,6-2,3 40,8-6,8	34MIL(E) 16MIL(W)		337 / 13,3	790 / 27,9		
SCFF-29		VCT-34FFP							780 / 27,5		
SCFF-40	4-24x56 FFP		6 levels R		10,2-1,7 30,6-5,1	34MIL(E) 16MIL(W)	34mm	362 / 14,3	855 / 30,1	1/10MIL	
SCFF-39	4-24x56 FDE FFP	VEC-MBR		100 / 4,0					840 / 29,6		10yds to ∞
SCFF-30		VCT-34FFP							810 / 26,6		
SCFF-41	5-30x56 FFP	VEC-MBR			8,2-1,4 24,5-4,1	26MIL(E) 16MIL(W)		392 / 15,4	810 / 26,6		
Next SCFF-47	1-10x28 ED CTR FFP	VET-CTR			41-4,1 123-12,3	45MIL(E) 20MIL(W)		278 / 10,9	651 / 23,0		100yds
Next SCFF-48	1-10x28 ED RAR FFP	VET-RAR	11 levels R						683 / 23,4		



I am happy to report the Continental scope performed perfectly on this elk hunt. I shot a bull Elk at 300 yards. The scope was great. During the hunt, it also retained a perfect zero, it was bright & clear. The eye relief shooting the 375 Ruger was just fine.

Gordon Marsh
The U.S.A

FEATURES



High Precision Adjustment



7075-T6 Turret



VePRO FMC



LaREE Lens



Light Transmission



Large Eye-box



Reset to Zero



Water Proof



Shock Proof



Edge-to-Edge Clarity



With Rings



Lens Cover



Tube Sunshade

RETICLE PATTERNS



German #4



VET-10BDC (MOA)



VECON-CDM (MOA)



Power ring throw lever (SCCON-TL)



Parallax big side wheel genll (SCCON-SW2)



Hunting ballistic turret (SCCON-HBT)



Metal flip-up cap

CONTINENTAL® HUNTING

Center dot illuminated reticle ideal for various hunting, such as: varmint, safari, big game and even dangerous game.

Simple, Reliable, And Easy To Use.



SKU	NAME	RETICLE	ILLUMINATION	EYE RELIEF (mm / in)	F.O.V (m @100 Meters) (ft @100 Yds)	ADJUSTMENT RANGE	TUBE SIZE	LENGTH (mm / in)	WEIGHT (net)(g / oz)	CLICK VALUE	PARALLAX ADJUSTMENT
SCOC-23	1-6x24 SFP				42,0-7,0 124,5-20,7			283 / 11,1	480 / 16,9	1/2MOA	
SCOC-46	1-6x24 FDE SFP	German #4				140MOA					100yds
SCOM-23	1.5-9x42 SFP				28,0-4,7 84,0-14,0			335 / 13,1	580 / 20,5		
SCOM-15	2-12x50 SFP	VET-10BDC	6 levels R	100 / 4,0	21,0-3,5 63,0-10,5		30mm		605 / 21,4		
SCOM-38	2.5-15x56 SFP	German #4			16,6-2,8 49,8-8,3	110MOA		370 / 14,6	670 / 23,6	1/4MOA	
SCOL-X21	3-18x50 SFP				13,8-2,3 41,5-6,9	75MOA		337 / 13,3	654 / 25,7		10yds to ∞
SCOL-X22	5-30x56 SFP	VECON-CDM			8,3-1,4 24,9-4,2	60MOA		400 / 15,7	688 / 27,1		15yds to ∞



Having used Vector Optics for my hunting and precision shooting needs over the past 3 years. I was beyond excited to get my hands on their latest offering, the Continental 8x 4-32x56 second focal plane hunting scope.

The 30mm monotube, capped 1/4MOA adjustments, and over 70 MOA adjustment range made it incredibly versatile for all of my hunting trips.

Furthermore, the lifetime warranty serves as a testament to Vector Optics' commitment to producing a top-tier, long-lasting scope that you can rely on for a lifetime.

Brett Eagle
South Africa

FEATURES



High Precision Adjustment



7075-T6 Turret



VePRO FMC



LaREE Lens



Light Transmission



ED Glass



Large Eye-box



Reset to Zero



Water Proof



Shock Proof



Edge-to-Edge Clarity



With Rings



Lens Cover



Tube Sunshade

RETICLE PATTERNS



German #4



VET-10BDC (MOA)



VECON-CDM (MOA)



Power ring throw lever (SCCON-TL)



Parallax big side wheel genll (SCCON-SW2)



Hunting ballistic turret (SCCON-HBT)



Metal flip-up cap

CONTINENTAL® HUNTING ED

The center dot illuminated reticle is ideal for various types of hunting, including varmint, safari, big game, and even dangerous game. Additionally, it features ED glass for improved clarity and performance.

Simple, Reliable, And Easy To Use.



SKU	NAME	RETICLE	ILLUMINATION	EYE RELIEF (mm / in)	F.O.V (m @100 Meters) (ft @100 Yds)	ADJUSTMENT RANGE	TUBE SIZE	LENGTH (mm / in)	WEIGHT (net)(g / oz)	CLICK VALUE	PARALLAX ADJUSTMENT
SCOC-37	1-8x24 ED SFP	German #4			41,0-5,1 123-15,4	140MOA		284 / 11.2	493 / 17.4	1/2MOA	100yds
SCOM-45	2-16x50 ED SFP	VET-10BDC	11 levels R	100 / 4.0	20,5-2,6 61,5-7,7	110MOA	30mm	345 / 13.6	611 / 21.6	1/4MOA	20yds to ∞
SCOL-50	3-24x56 ED SFP	VECON-CDM			13,7-1,7 41,0-5,1	80MOA		376 / 14.8	736 / 26.0		



From the very first days, my Continental 5-30 became a faithful assistant in long-range shots. I tested the reliability of the sight on myself and my large caliber (300 win mag). The clarity of clicks and the accuracy of the mechanisms for entering amendments are at the highest level! The picture quality provided by excellent glass surprised even experienced high precision athletes.

Modern reticles made with high precision allows you to make quick adjustments without resorting to rotating tactical drums. Very pleased with the sight.

Five shooters in our company already have similar devices from Vector Optics.

Alexey Oboishev

FEATURES



High Precision Adjustment



7075-T6 Turret



VePRO FMC



LaREE Lens



Light Transmission



Large Eye-box



Zero Stop (if applicable)



Turret Lock



Reset to Zero



Water Proof



Shock Proof



Edge-to-Edge Clarity



With Rings






Lens Cover



Tube Sunshade

RETICLE PATTERNS



Power ring throw lever (SCCON-TL)



Parallax big side wheel genll (SCCON-SW2)



Metal flip-up cap

CONTINENTAL® TACTICAL

It covers not only compact and lightweight LPVO but also scope with Christmas tree style reticle identifies and engages target at substantial distance.

Compete, Protect, Defend.



SKU	NAME	RETICLE	ILLUMINATION	EYE RELIEF (mm / in)	F.O.V (m @100 Meters) (ft @100 Yds)	ADJUSTMENT RANGE	TUBE SIZE	LENGTH (mm / in)	WEIGHT (net)(g / oz)	CLICK VALUE	PARALLAX ADJUSTMENT
SCOC-23T	1-6x24 SFP	VET-BTR			42-7.0	45MIL					
SCOC-34	1-6x24 FDE SFP				124.5-20.7			283 / 11.1	480 / 16.9		100yds
SCOC-44	1-6x24 SFP	VET-FDR				40MIL					
SCOL-53	3-18x50 ARI SFP	VCT-10A	6 levels R	100 / 4.0	13.8-2.3 41.5-6.9	21.5MIL	30mm	337 / 13.3	580 / 20.5	1/10MIL	10yds to ∞
SCOL-54	4-24x50 ARI SFP				10.4-1.7 31.1-5.2	20MIL		370 / 14.6	605 / 21.4		
SCOL-43	4-24x50 FDE SFP	VCT-20A									15yds to ∞
SCOL-47	5-30x56 ARI SFP				8.3-1.4 24.9-4.2	16.5MIL		400 / 15.7	630 / 22.2		



The Vector Continental ED Tactical Series Rifle Scopes are simply one of the best values in the scope market. They offer edge to edge clarity throughout their magnification ranges and have a very forgiving eye box that allows the shooter to quickly acquire his or her target fast.

I highly recommend the Vector Continental scope line and have confidence you will be pleased with the quality and features. I have been extremely impressed with the quality and reliability of these scopes.

Rodney Davis
The U.S.A

FEATURES



High Precision Adjustment



7075-T6 Turret



VePRO FMC



LaREE Lens



Light Transmission



ED Glass



Large Eye-box



Zero Stop



Turret Lock



Reset to Zero



Water Proof



Shock Proof



Edge-to-Edge Clarity



With Rings



Lens Cover



Tube Sunshade

RETICLE PATTERNS




VET-BTR (MIL)



VCT-10A (MIL)




VCT-20A (MIL)



VEC-FDR (MIL)



VCT-MOA (MOA)



VCT-MIL (MIL)



Power ring throw lever (SCCON-TL)



Parallax big side wheel genil (SCCON-SW2)



Metal flip-up cap

CONTINENTAL® TACTICAL ED

It covers not only compact and lightweight LPVO scopes, but also scopes with Christmastree-style reticles, with ED glass and up to 48x magnification. This allows for target identification and engagement at substantial distances.

Compete, Protect, Defend.



SKU	NAME	RETICLE	ILLUMINATION	EYE RELIEF (mm / in)	F.O.V (m @100 Meters) (ft @100 Yds)	ADJUSTMENT RANGE	TUBE SIZE	LENGTH (mm / in)	WEIGHT (net)(g / oz)	CLICK VALUE	PARALLAX ADJUSTMENT
SCOC-T37	1-8x24 ED SFP	VET-BTR			41,0-5,1 123-15,4	40MIL		284 / 11,2	523 / 18,4		100yds
^{NEW} SCOC-45	1-8x24 ED SFP	VET-FDR			20,5-2,6 61,5-7,7	32MIL		290 / 11,4	530 / 18,7		
SCOM-T39	2-16x44 ED SFP	VTC-10A			13,7-1,7 41-5,1	23MIL	30mm	345 / 13,6	611 / 21,6	1/10MIL	
SCOL-T50	3-24x56 ED SFP	VCT-20A	11 levels R	100 / 4,0	10,3-1,3 30,8-3,8	20MIL		376 / 14,8	836 / 29,5		20yds to ∞
SCOL-T51	4-32x56 ED SFP				6,8-0,9 20,5-2,6	48MOA		386 / 15,2	832 / 29,4	1/8MOA	
^{NEW} SCOL-TE52	6-48x56 ED MOA SFP	VCT-MOA				14MIL		403 / 15,9	807 / 28,5	1/10MIL	
^{NEW} SCOL-TM52	6-48x56 ED MIL SFP	VCT-MIL									

— PREMIUM LINE —



PREMIUM LINE

Lifetime Warranty



TAURUS

PARAGON



Our Vector Optics Premium lines, including TAURUS, PARAGON, FRENZY, and SCRAPPER, offer exceptional clarity, superior quality, and a lifetime warranty.

These well-crafted products provide an excellent shooting experience and long-lasting durability. Trust in our premium product line's quality and performance, backed by a lifetime warranty.



Clear vision & resolution, which indicates the quality of vector optics. Its weight, obedient clicks, FFP & SFP, all these, taking into account the pleasure of shooting. For which it deserves great approval and gratitude.

Levan Mosiashvili
Georgia

FEATURES



Fully Multi-coated



HD Optics System
(if applicable)



Zero Stop
(if applicable)



Turret Lock



Reset to Zero



Water Proof



Shock Proof



Edge-to-Edge Clarity



Target Long Range



With Rings






Lens Cover



Throw Lever
compatible

RETICLE PATTERNS




Scope universal big side wheel
(SCBSW-U1)

TAURUS 30MM

LPVO, medium & high power scope are engineered to deliver your CQB and long-range shooting with confidence at any magnification and distance.

Outstanding Clarity, Superior Quality.

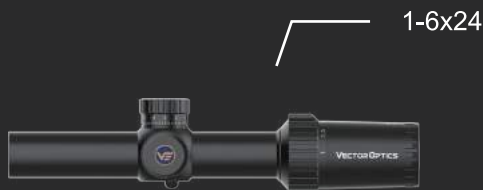

SKU	NAME	RETICLE	ILLUMINATION	EYE RELIEF (mm / in)	F.O.V (m @100 Meters) (ft @100 Yds)	ADJUSTMENT RANGE	TUBE SIZE	LENGTH (mm / in)	WEIGHT (net)(g / oz)	CLICK VALUE	PARALLAX ADJUSTMENT
SCFF-27	1-6x24 FFP	VTC-CMIL			33.5-5.5 110.0-18.0	60MIL		275 / 10.8	545 / 19.2	1/5MIL	100yds
SCFF-11	3-18x50 FFP				11.0-1.9 32.9-5.8	17.5MIL		335 / 13.2	750 / 26.5		
SCFF-17	4-24x50 FFP	MPX1			9.1-1.5 25.4-4.2	15MIL		380 / 15.0	770 / 27.2		20yds to ∞
SCFF-14	5-30x56 FFP				6.8-1.2 20.4-3.5	14MIL		400 / 15.7	815 / 28.7		
SCOC-42	1-6x24 SFP	VTC-CMIL	6 levels R	100 / 4.0	37.1-6.1 111.2-18.3	40MIL	30mm	270 / 10.6	548 / 19.3	1/10MIL	100yds
SCOM-43	2-16x50 HD SFP	VTA-6 MIL			20.8-2.7 61.7-7.7	30MIL(E) 18MIL(W)		337 / 13.3	766 / 27.0		10yds to ∞
SCOL-45	4-16x44 HD SFP	MPX1			8.7-2.2 26.2-6.6	24MIL		355 / 14.0	730 / 25.7		20yds to ∞
SCOL-46	6-24x50 HD SFP				6.0-1.5 17.9-4.5	19.5MIL		360 / 14.2	763 / 26.9		10yds to ∞

PREMIUM



The Taurus Premium line 34MM are high quality and robust rifle scopes without pointless extras. The design is clearly designed for function and makes the Taurus line the perfect all-rounder. The large selection from LPVO to high magnification long range scopes and the great adjustment options make the Taurus line suitable for sport shooting and hunters.

The Taurus line has been with me for a long time now, whether it's a match or training, and it has always impressed me again and again especially the good quality for the low price is something you can't get from any other company

Marco Geiger
Germany

FEATURES



High Precision Adjustment



Fully Multi-coated



ED Glass
(if applicable)



HD Optics System
(if applicable)



Zero Stop



Turret Lock



Reset to Zero



Water Proof



Shock Proof



Edge-to-Edge Clarity



Target Long Range



With Rings



Lens Cover



Throw Lever Compatible


RETICLE PATTERNS




VTA-5 MIL



VTA-4 MOA



VTA-3 MIL



VTA-6 MIL



VTA-7 MIL




Scope universal big side wheel
(SCBSW-U1)

New

TAURUS 34MM HD & ED

LPVO, medium & high power optics integrate renowned HD & ED optics system w/ wide angle and long eye relief provides sharp images at any magnification.

Crystal, Classic, Competitive.

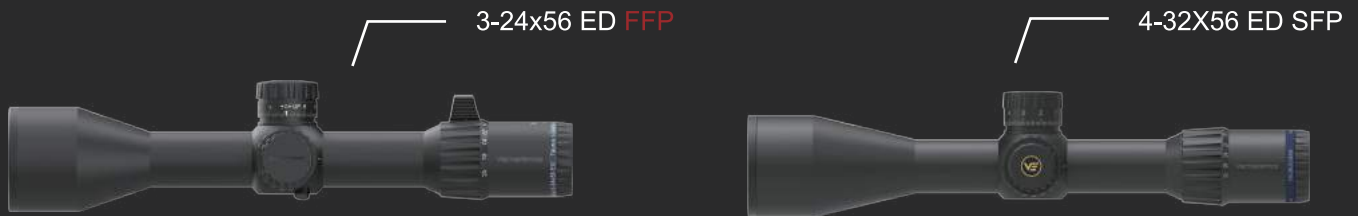

SKU	NAME	RETICLE	ILLUMINATION	EYE RELIEF (mm / in)	F.O.V. (m @100 Meters) (ft @100 Yds)	ADJUSTMENT RANGE	TUBE SIZE	LENGTH (mm / in)	WEIGHT (net)(g / oz)	CLICK VALUE	PARALLAX ADJUSTMENT
SCFF-33	3-24x56 ED FFP	VTA-5 MIL	N/A		13.7-1.7 41.0- 5.13	30MIL(E) 20MIL(W)		347 / 13.7	1007 / 35.5		10yds to ∞
SCFF-34	4-32x56 ED FFP				10.3-1.3 30.8-3.85	28MIL(E) 16MIL(W)		360 / 14.2	1007 / 35.5	1/10MIL	25yds to ∞
SCFF-45	4-16x44 MIL HD FFP	VTA-3 MIL			10.5-2.6 31.4-7.85	25MIL		318 / 12.5	860 / 30.3		15yds to ∞
SCFF-50	4-16x44 MOA HD FFP	VTA-4 MOA				110MOA(E) 50MOA(W)				1/4MOA	
SCFF-46	6-24x50 MIL HD FFP	VTA-3 MIL		100 / 4.0		17.5MIL	34mm			1/10MIL	
SCFF-51	6-24x50 MOA HD FFP	VTA-4 MOA	6 levels R		7.0-1.7 20.9-5.2	80MOA(E) 36MOA(W)		353 / 13.9	926 / 32.7	1/4MOA	10yds to ∞
SCOL-55	3-24x56 ED SFP	VTA-7 MIL			13.7-1.7 41.0-5.1	30MIL(E) 20MIL(W)		347 / 13.7	991 / 34.9		15yds to ∞
SCOL-56	4-32x56 ED SFP	VTA-6 MIL			10.3-1.3 30.8-3.85	28MIL(E) 16MIL(W)		360 / 14.2	1004 / 35.4	1/10MIL	25yds to ∞

PREMIUM













I used the Vector Optics Paragon 3-15x44 1in scope during my hunting trip, and it completely satisfied me with its excellent optical performance and quality.


This scope has a wide magnification range and a durable construction, it also allows very fine and precise adjustment. I highly recommend it to all hunters who value the quality and reliability of their optics.

Andrey Latkin Turkov

FEATURE

-  VePRO FMC
-  LaREE Lens
-  Zero Stop (if applicable)
-  Turret Lock (if applicable)
-  Reset to Zero
-  Water Proof IP67
-  Shock Proof 1000G
-  With Rings
-  Lens Cover
-  Throw Lever Compatible

RETICLE PATTERNS

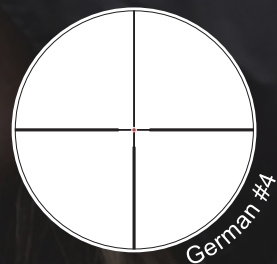

German #4



VEPG-TMIL (MIL)

PARAGON 25.4MM 1"

Combines premium optics & reliable mechanical adjustment in a scope fit for any fine rifle. Hunting capped 1/4MOA adjustment. Tactics w/ zero-stop 1/10MIL turret.

Beyond Your Expectations.



3-15x44 Tactical



4-20x50 Hunting



SKU	NAME	RETICLE	ILLUMINATION	EYE RELIEF (mm / in)	F.O.V. (m @100 Meters) (ft @100 Yds)	ADJUSTMENT RANGE	TUBE SIZE	LENGTH (mm / in)	WEIGHT (net)(g / oz)	CLICK VALUE	PARALLAX ADJUSTMENT
SCOM-37	3-15x44 SFP	German #4			12.4-2.6 37.2-7.7	60MOA		335 / 13.2	635 / 22.4	1/4MOA	
SCOM-T37		VEPC-TMIL				17.5MIL			715 / 25.2	1/10MIL	
SCOL-44	4-20x50 SFP	German #4	6 levels R	92 / 3.6	9.3-1.9 27.9-5.6	60MOA	1" (25.4mm)	343 / 13.5	695 / 24.5	1/4MOA	10yds to ∞
SCOL-T44		VEPC-TMIL				17.5MIL			765 / 27.0	1/10MIL	

PREMIUM

/ PARAGON PRISM SCOPE



I have fallen in love with the Vector Optics Paragon series magnifiers and prism scopes in the past year, these work well with my shooting sports. I use the Paragon 4x Micro paired with a red dot scope on my main competition gun. Key features why I chose the paragon prism scope over others are that the mount is very stable with zero wobbles in either use or swung to the side and the optic clarity is excellent, a key feature in fast-paced shooting where it's vital to identify the target fast and engage it equally fast.

Jani Nordman
Finland

FEATURES



Fully Multi-coated



Close Quarter Battle



Water Proof



Shock Proof



Light weight



Nitrogen purged

RETICLE PATTERNS



VEP-CDR (MOA)



VEOS-MBR (MOA)



RUM cantilever picatinny riser mount (SCPSM-01)



Red dot sight offset mount MAG (SCPSM-C01)



RUM low profile picatinny mount (SCPSM-02)

PARAGON PRISM SCOPE

It covers not only magnifiers but scope with wide angle and true long eye relief. Adjustable diopter ensures crisp clear reticle image. Offer variable center height mounting options.

Small Size But It Tells Big.



SKU	NAME	RETICLE	ILLUMINATION	EYE RELIEF (mm / in)	F.O.V (m @100 Meters) (ft @100 Yds)	ADJUSTMENT RANGE	CENTER HEIGHT (mm / inch)	LENGTH (mm / in)	WEIGHT (net)(g / oz)	CLICK VALUE	PARALLAX ADJUSTMENT
SCPS-M01	1x16	VEP-CDR		76 / 3.0	25.4 76.3			75 / 3.0	225 / 7.9		
SCPS-M03	3x18	VEPS-MBR	10 Levels	68 / 2.7	12.9 38.8	100MOA	36 / 1.4	77 / 3.1		1MOA	100yds
SCPS-M04	4x24				9.6 28.8			81 / 3.2	250 / 9.8		

PREMIUM

— CLASSIC LINE —



CLASSIC LINE

5-year Warranty



VEYRON

ORION

HUGO

MINOTAUR

CONSTANTINE

MATIZ





Our Classic product line is the ideal choice for those looking for a reliable option that offers a balance of performance and affordability.

These products come with a reassuring 5-year warranty, providing peace of mind throughout your shooting adventures.













Michał Mierkowski
Poland

The Veyron stands out from other models due to its compact size, low weight, and ability to maintain high image quality. Despite its small size, this scope offers up to x24 magnification, making it perfect for small, light rifles. It provides a clean and transparent image, distinguishing it from scopes offered by other companies.



FEATURES

-  Extra Short Size
-  Fully Multi-coated
-  Turret Lock
-  Reset to Zero
-  Shock Proof
-  Nitrogen Purged
-  Side Parallax Correction
-  With Rings
-  Honeycomb Sunshade
-  Flip-up Cap



Scope universal big side wheel (SCBSW-U1)



Scope Power Ring Lever (SCOT-57FF)

VEYRON

It features low, medium & high-power editions with 1/10MIL turret-lock adjustment, which are especially designed for light weight firearms, PCP, springer and gasram recoiling air rifles.

Ideal For Your Hunting And General Shooting.



2-8x32



6-24x44















SKU	NAME	RETICLE	ILLUMINATION	EYE RELIEF (mm / in)	F.O.V (m @100 Meters) (ft @100 Yds)	ADJUSTMENT RANGE	TUBE SIZE	LENGTH (mm / in)	WEIGHT (net)(g / oz)	CLICK VALUE	PARALLAX ADJUSTMENT
SCOC-43	2-8x32IR SFP	MPR-V5	6 levels R		17.4-4.35 52.4-13.1	23MIL		220 / 8.7	425 / 15.0		100yds
SCOM-24	3-12x44 SFP	MPR-4	N/A					245 / 9.7	500 / 17.6		
SCOM-40	3-12x44IR SFP	MPR-V10	6 levels R		11.7-2.9 35.1-8.7				515 / 20.3		
SCFF-21	3-12x44 FFP	MPR-4	N/A						500 / 17.6		
SCOL-48	4-16x44IR SFP	MPR-V10	6 levels R	90-85 / 3.5-3.4			30mm		545 / 21.5	1/10MIL	
SCFF-22	4-16x44 FFP	MPR-4	N/A		8.7-2.2 26.2-6.55	17.5MIL		270 / 10.6	530 / 18.7		10yds to ∞
SCFF-38	4-16x44IR FFP	MPR-V5	6 levels R						595 / 23.4		
SCOL-49	6-24x44IR SFP	MPR-V10							595 / 23.4		
SCFF-23	6-24x44 FFP	MPR-4	N/A		5.8-1.45 17.5-4.3			295 / 11.6	580 / 20.5		
SCFF-37	6-24x44IR FFP	MPR-V5	6 levels R						580 / 20.5		



Randy Wiranata
Indonesia

If you want smooth hunting, borrow one hundred first, the Orion series gives you what you want, save your hunting moment.

FEATURES


-  Fully Multi-coated
-  HD Optics System
-  Target Long Range
-  Zero Stop
-  Turret lock
-  Reset to Zero
-  Shock Proof
-  Edge-to-Edge Clarity
-  Side parallax correction
-  With Rings
-  Flip-up Cap
-  Tube Sunshade




Scope universal big side wheel (SCBSW-U1)



VE-RDF (MOA)



VOR-4 MIL



VOR-5 MOA



VOR-6 MIL



VOR-7 MIL

ORION

Designed with fully multi-coated, reduced-glare lenses that deliver edge-sharp image clarity. Purpose-built reticle creates optimal target engagement in a wide range of scenarios. Precise adjustment with turret lock & zero-reset.

Clear Image, Clear Choice.




SKU	NAME	RETICLE	ILLUMINATION	EYE RELIEF (mm / in)	F.O.V. (m @100 Meters) (ft @100 Yds)	ADJUSTMENT RANGE	TUBE SIZE	LENGTH (mm / in)	WEIGHT (net)(g / oz)	CLICK VALUE	PARALLAX ADJUSTMENT
New SCFF-49	3-18x44 HD FFP	VOR-4 MIL		96-95 / 3.8-3.7	12.7-2.1 38.2-6.3	100MOA(E) 60MOA(W)			798 / 28.1	1/10MIL	
New SCOL-57	3-18x50 HD SFP	VOR-5 MOA						343 / 13.5	825 / 29.1	1/4MOA	
New SCOL-62	4-16x44 HD SFP	VOR-7 MIL			9.6-2.3 28.8-6.8	30MIL(E) 20MIL(W)			753 / 26.6		
New SCFF-59	4-16x44 HD FFP	VOR-4 MIL	6 levels R	95 / 3.7		32MIL(E) 18MIL(W)	30mm		756 / 26.7	1/10MIL	10yds to ∞
New SCOL-63	6-24x50 HD SFP	VOR-6 MIL				23MIL(E) 18MIL(W)		353 / 13.9	790 / 27.9		
New SCFF-44	6-24x50 MOA FFP	VE-RDF		85-80 / 3.5-3.1	6.3-1.6 18.9-4.7	90MOA(E) 60MOA(W)		340 / 13.4	782 / 27.6	1/4MOA	
New SCFF-61	6-24x50 MIL HD FFP	VOR-4 MIL		95 / 3.7		23MIL(E) 18MIL(W)		343 / 13.5	756 / 26.7	1/10MIL	



Karl Orange
England

Big on quality, small on price.



FEATURES



Fully Multi-coated



Turret Lock



Reset to Zero



Digital Control
(if applicable)



Shock Proof



Nitrogen Purged



Side Parallax
Correction



With Rings



Flip-up Cap



Tube Sunshade



Scope universal big side wheel
(SCBSW-U1)

HUGO

Min focus from 10 yards scopes with wide field of view and 4in long eye relief. Premium fully multi coated lens delivers crisp and sharp image. It provides wire etched glass or fiber reticle with 1/4MOA turret lock adjustment.

Range It, Dial It And Aim Dead On.



SKU	NAME	RETICLE	ILLUMINATION	EYE RELIEF (mm / in)	F.O.V (m @100 Meters) (ft @100 Yds)	ADJUSTMENT RANGE	TUBE SIZE	LENGTH (mm / in)	WEIGHT (net)(g / oz)	CLICK VALUE	PARALLAX ADJUSTMENT
SCOM-30	3-12x44 SFP	VOW-10BDC	N/A		10.5-2.6 31.5-7.9	60MOA			588 / 20.7	1/4MOA	
SCOM-31	3-12x44 GT SFP	VOI-10BDC	10 levels R +1 NV					325 / 12.8	616 / 21.7		
SCOM-44	3-12x40 SFP	VHU-3 MIL			8.7-2.8 26.0-8.4	26MIL			612 / 21.6	1/10MIL	
SCOL-29	4-16x44 SFP	VOW-10BDC	N/A	105-100 / 4.1-3.9	7.0-1.8 21.1-5.3		1" (25.4mm)	345 / 13.6	641 / 22.6		10yds to ∞
SCOL-30	4-16x44 GT SFP	VOI-10BDC	10 levels R +1 NV			60MOA			650 / 22.9	1/4MOA	
SCOL-32	6-24x50 GT SFP				5.3-1.3 15.8-4.0			360 / 14.2	673 / 23.1		
SCOL-31	6-24x50 SFP	VOW-10BDC	N/A								




Tomasz Kocemba
Poland

It fairly large with the 60mm objective and 34mm tube, but not overly large like some other scopes offering such great magnification.

The image is bright and the optical quality is surprisingly good for the price. It introduces shooter to a new world of x60 magnification.

Fine reticle, with illuminated, well-calibrated central dot allows you to aim with accuracy like never before. The reticle markings for holdover or windage designed to keep that sight picture as clean and uncluttered as possible, and are good for most long-distance shots.



FEATURES

-  Fully Multi-coated
-  Target Long Range
-  Zero Stop
-  Turret Lock
-  Reset to Zero
-  Digital Control
-  Nitrogen Purged
-  Side Parallax Correction
-  Audible mechanical clicks
-  Shock Proof
-  With Rings
-  Flip-up Cap
-  Tube Sunshade



Scope universal big side wheel (SCBSW-U1)

MINOTAUR

Purpose-built for the competitive shooter. Center dot illuminated reticle with 1/8MOA zero stop adjustment for your precision bench rest at long range and accurate competition.

It's A Loyal Partner For Your Competition Shooting.



SKU	MAGNIFICATION OBJECTIVE LENS DIAMETER	RETICLE	ILLUMINATION	EYE RELIEF (mm / in)	F.O.V. (m @100 Meters) (ft @100 Yds)	ADJUSTMENT RANGE	TUBE SIZE	LENGTH (mm / in)	WEIGHT (net)(g / oz)	CLICK VALUE	PARALLAX ADJUSTMENT
SCOL-36	10-50x60 DOT SFP	VETD-LR			3.7-0.7 11.0-2.2				960 / 33.9		
SCOL-39	10-50x60 MFL SFP	VEMP-LR									
SCOL-37	12-60x60 DOT SFP	VETD-LR	10 levels +1 NV	96-95 / 3.8-3.7	3.05-0.6 9.15-1.8	50MOA	34mm	425 / 16.7		1/8MOA	10yds to ∞
SCOL-40	12-60x60 MFL SFP	VEMP-LR									
SCOL-38	46x60 DOT SFP	VETD-LR			0.9 2.75				945 / 33.3		
SCOL-41	46x60 MFL SFP	VEMP-LR									



Sebastian Wickert
Germany

Vector Optics Constantine series is characterized by high reliability and an excellent price/performance ratio. The brightness and sharpness and optical performance of this riflescope are surprisingly good. The illuminated BDC reticle is up to all situations. Whether 25m or 300m, the Constantine is always a good companion and a very good riflescope in this price range.

FEATURES



Fully Multi-coated



1x with Eyes Open



CQB
Close-quarters Battle



Reset to Zero



Fiber Optics Illumination
(if applicable)



Shock Proof



Edge-to-Edge Clarity



Nitrogen Purged




With Rings




Flip-up Cap



Throw Lever Compatible



VECNS-G4F (MOA)



VOS-EHT (MIL)



VOF-EHT (MIL)



VOS-TMOA (MOA)



VCO-1 MIL

CONSTANTINE

Starts at a true 1x power, which is specific for your recon rifle optic. Fiber or etched glass reticle w/ better eye relief and eye-box range for fast acquisition.

Simple, Versatile, Effective.



SKU	NAME	RETICLE	ILLUMINATION	EYE RELIEF (mm / in)	F.O.V (m @100 Meters) (ft @100 Yds)	ADJUSTMENT RANGE	TUBE SIZE	LENGTH (mm / in)	WEIGHT (net)(g / oz)	CLICK VALUE	PARALLAX ADJUSTMENT
SCOC-36	1-6x24 SFP	VECNS-G4F		100 / 3.9	38.75-6.4 116.2-19.2	120MOA		264 / 10.4	530 / 18.6	1/2MOA	
SCOC-27	1-8x24 SFP	VOS-EHT			41.9-4.9 125.6-14.8			263 / 10.3			
SCFF-32	1-8x24 CTR <i>FFP</i>	VOF-EHT	11 levels <i>R</i>	95 / 3.7	38.9-4.9 116.6-14.8	35MIL	30mm	273 / 10.7	500 / 17.3	1/10MIL	100yds
<i>New</i> SCFF-60	1-8x24 RAR <i>FFP</i>	VCC-1 MIL									
SCOC-31	1-10x24 SFP	VOS-TMOA		95-90 / 37-3.5	38.0-3.8 113.9-11.5	120MOA		280 / 11.0	530 / 18.6	1/2MOA	
SCOC-35	1-10x24 SFP	VECNS-G4F		90 / 3.5				268 / 10.5	540 / 19.0		



René Kristiansen
Denmark

The Matiz riflescope is a 1-inch scope with capped adjustment. It features an FMC optical system housed in a rugged, aircraft-grade aluminum 1-inch main tube. This scope offers a wide field of view at low power and enables detailed viewing at high power. It is particularly well-suited for rimfire platforms and is suitable for medium to long-range shooting. Moreover, it is user-friendly for shooters of all skill levels.

FEATURES



Fully Multi-coated



Reset to Zero



Shock Proof



Edge-to-Edge Clarity



Hunting style



With Rings




Lens Cover




VOW-10BDC (MOA)



VOW-MOA (MOA)



Duplex (MOA)



VMD-2 (MIL)



German #4 (MOA)

MATIZ

FMC optical system housed in a rugged and aircraft-grade aluminum 1in main tube. Provide the great field of view at low power and tell the detail at high power. Ideal for your rimfire platform from medium to long range shooting.

Easy To Use For Any Shooter.



SKU	NAME	RETICLE	ILLUMINATION	EYE RELIEF (mm / in)	F.O.V (m @100 Meters) (ft @100 Yds)	ADJUSTMENT RANGE	TUBE SIZE	LENGTH (mm / in)	WEIGHT (net)(g / oz)	CLICK VALUE	PARALLAX ADJUSTMENT
SCOM-26	2-7x32 SFP	Duplex		108-98 / 4.2-3.9	14.0-4.0 42.0-12.05			280 / 11.0	375 / 13.2		
SCOM-33	2-7x32 MOA SFP	VOW-MOA	N/A			60MOA				1/4MOA	
SCOM-27	3-9x40 MOA SFP	Duplex			11.5-3.8 34.55-11.5				405 / 14.3		100yds
SCOM-32	3-9x40 MIL SFP	VMD-2		105-96 / 4.1-3.8		17.5MIL	1" (25.4mm)	305 / 12.0	398 / 14.0	1/10MIL	
SCOM-28	3-9x50 SFP	German #4	11 levels R		11.0-3.8 33.0-11.5			310 / 12.2	500 / 17.6		
SCOM-29	4-12x40 SFP	VOW-10BDC	N/A	108-98 / 4.2-39	7.9-2.4 23.6-7.3	60MOA			520 / 18.3	1/4MOA	
SCOL-28	6-18x44 SFP			102-96 / 4.0-3.9	4.4-1.9 13.1-5.75			345 / 13.6	542 / 19.1		10yds to ∞

— ENTRY LINE —



ENTRY LINE

5-year Warranty



GRIMLOCK

MUSTANG

FORESTER

SENTINEL

GRIZZLY



Our entry-level product line is perfect for beginners and casual shooters who prioritize affordability without compromising on quality.

These products provide a great starting point and come with the added assurance of a generous 5-year warranty.



Mustang Grimlock

LOW-POWER VARIABLE OPTICS





GRIMLOCK & MUSTANG

30mm 4x & 6x true 1x power LPVO scope which have capped 1/2 MOA adjustment and edge-to-edge image. Come with power ring level.

30mm 4x zoom LPVO SFP & FFP optics with one-piece picatinny mount, which is 100mm long eye relief & specifically designed for AR platform.



SKU	NAME	RETICLE	ILLUMINATION	EYE RELIEF (mm / in)	F.O.V (m @100 Meters) (ft @100 Yds)	ADJUSTMENT RANGE	TUBE SIZE	LENGTH (mm / in)	WEIGHT (net)(g / oz)	CLICK VALUE	PARALLAX ADJUSTMENT
SCOC-13II	1-6x24 SFP	VTC-3		96-95 / 3.9-3.7	38.9-6.4 116.6-19.2			265 / 10.4	500 / 17.6		
SCOC-40	1-4x24 SFP	VTC-DND	6 levels R			100MOA	30mm	251 / 9.9		1/2MOA	100yds
SCOC-29	1-4x30 SFP	Chevron	R & G & B	105-100 / 4.1-3.9	35.3-8.7 105.9-26.2			250 / 9.9	725 / 25.6		
SCFF-36	1-4x24 FFP	M-4RD	6 levels R					255 / 10.0	485 / 17.1		



50 / FORESTER



YuKi'OSMI' Sumimura
Japan

You will be amazed by the clear, edgeless view that is beyond its price, and the marvelous depth of field that spreads in front of you. Forester will change your way of thinking about shooting.



FEATURES



Fully Multi-coated



Close Quarter Battle



Reset to Zero



Shock Proof



Edge-to-Edge Clarity



With Rings



Lens Cover




Throw Lever Compatible

ALL OUT
OF FUCKS
TO GIVE

FORESTER

It provides a wide selection of magnifications and characteristics with aggressive price level. Deliver long eye relief, wide field of view, large eye box and edge-to-edge image with MOA adjustment.

It's Just Your First Scope.

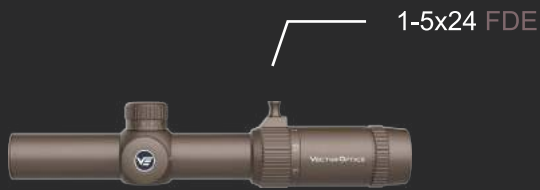

SKU	NAME	RETICLE	ILLUMINATION	EYE RELIEF (mm / in)	F.O.V (m @100 Meters) (ft @100 Yds)	ADJUSTMENT RANGE	TUBE SIZE	LENGTH (mm / in)	WEIGHT (net)(g / oz)	CLICK VALUE	PARALLAX ADJUSTMENT
SCOC-28	1-4x24 SFP	VFD-3	N/A	110-90 / 4.3-3.5	17.4-4.35 73.3-23.6	100MOA		260 / 10.2	390 / 13.8		
SCOC-03II	1-5x24 SFP			115-95 / 4.5-3.7	24.4-6.6 73.3-19.9			260 / 10.2	425 / 15.0		
SCOC-32	1-5x24 FDE SFP	VFD-2	11 levels R			120MOA				1/2MOA	
SCOC-38	1-8x24 SFP			85-75 / 3.3-3.0	35.0-6.3 105-18.9		30mm	262 / 10.3	580 / 20.5		50yds
SCOC-39	1-8x24 FDE SFP										
SCOM-35	3-9x40 SFP	VFD-3	N/A	75-70 / 3.0-2.8	12.9-4.4 38.8-13.1	100MOA		295 / 11.6	430 / 15.2		
SCOM-02	2-10x40 SFP	VFD-2	11 levels R	100-90 / 4.0-3.5	14.0-3.5 41.9-10.5	80MOA		340 / 13.4	500 / 17.6	1/4MOA	
SCOM-16	3-15x50 SFP			95-85 / 3.7-3.3	12.1-2.4 36.2-7.2			385 / 15.1	575 / 20.3		100yds



Rob Taylor
U.K.

I use the sentinel gen 2 10-40x50 on all my rifles. I have compared the sentinel gen 2 to other manufacturers scopes costing 5 times more and every time the sentinel wins. A friend had a scope costing £2600, he compared it to my sentinel. He bought a sentinel and sold his £2600 scope!

FEATURES



Fully Multi-coated



Target Long Range



Zero Stop
(if applicable)



Turret Lock



Reset to Zero



Shock Proof



Nitrogen Purged



Side Parallax
Correction



Edge-to-Edge Clarity



With Rings



Honeycomb
Sunshade



Flip-up Cap




Scope universal big side wheel
(SCBSW-U1)




Scope Power Ring Lever
(SCOT-57FF)



COM-25M (MOA)




VSE-3 MOA




VSE-4 MOA



VSE-5 MOA



VSE-6 MOA



VSE-7 MOA

SENTINEL

It is engineered to deliver clear image for benchrest competition, PCP and general shooting. Affordable price with exposed MOA turret-lock or zero-stop adjustment. Parallax correction at side with illumination.

As Classic As It Is Versatile.



SKU	NAME	RETICLE	ILLUMINATION	EYE RELIEF (mm / in)	F.O.V (m @100 Meters) (ft @100 Yds)	ADJUSTMENT RANGE	TUBE SIZE	LENGTH (mm / in)	WEIGHT (net)(g / oz)	CLICK VALUE	PARALLAX ADJUSTMENT
New SCOL-59	4-16x50 SFP	VSE-4 MOA		100 / 4.0	8.2-2.1 24.6-6.3	70MOA(E) 50MOA(W)		355 / 14.0	759 / 26.8		
New SCOL-60	6-24x50 SFP	VSE-7 MOA	6 levels R	105-100 4.1-3.9	6.1-1.5 18.3-4.6	50MOA(E) 40MOA(W)		369 / 14.5	792 / 27.9	1/4MOA	
New SCOL-61	8-32x50 SFP	VSE-4 MOA				40MOA(E) 30MOA(W)		408 / 16.0	840 / 29.6		
SCOL-34	10-40x50 SFP	COM-25M	N/A			50MOA			775 / 27.3		
New SCOL-58	10-40x50 SFP	VSE-6 MOA	11 levels R	92-85 / 3.6-3.3	1.3-0.4 3.8-1.1	60MOA	30mm	405 / 15.9	792 / 27.9	1/8MOA	10yds to ∞
New SCFF-56	4-16x44 FFP	VSE-3 MOA		100 / 4.0	8.2-2.1 24.6-6.3	70MOA(E) 50MOA(W)		368 / 14.5	775 / 27.3	1/4MOA	
New SCFF-57	6-24x50 FFP	VSE-3 MOA	6 levels R		6.1-1.5 18.3-4.6	55MOA(E) 40MOA(W)					
New SCFF-58	5-25x50 FFP	VSE-5 MOA		95 / 3.7	7.7-1.5 23.0-4.6	80MOA(E) 60MOA(W)		356 / 14.0	792 / 27.9		

ENTRY



Legat Werner
Austria

The right scope for a young hunter on a small budget. It easily tolerates up to 30.06 and has crystal-clear and bright optics with a very unbleed red dot. I use it on an air rifle (45 joules) where even expensive brands can't withstand the recoil.

This is where the Grizzly shows its quality.



FEATURES



Fully Multi-coated



Reset to Zero



Fiber Optics
Illumination
(if applicable)



Shock Proof



With Rings



Edge-to-Edge Clarity



Lens Cover



Throw Lever
Compatible

GRIZZLY

It's a classic scope, with decent image quality and reliable MOA adjustment. A variety of configurations rugged in a robust 30mm monotube. At this price, you can spend more time in the woods. Provide fiber reticle edition for the strongest sunlight condition.

Get More Than You Pay For.



SKU	NAME	RETICLE	ILLUMINATION	EYE RELIEF (mm / in)	F.O.V (m @100 Meters) (ft @100 Yds)	ADJUSTMENT RANGE	TUBE SIZE	LENGTH (mm / in)	WEIGHT (net)(g / oz)	CLICK VALUE	PARALLAX ADJUSTMENT
SCOC-11	1-4x24 SFP	German #4	11 levels R	105-100 / 4.1-3.9	35.3-8.7	120MOA	30mm	260 / 10.2	470 / 16.6	1/2MOA	
SCOM-09	3-12x56 SFP				12.2-3.1			330 / 13.0			
SCOM-42	3-12x56 SFP	German #4 Fiber	6 levels R	97 / 3.8	13.8-3.5	70MOA		345 / 13.6	605 / 21.3	1/4MOA	100yds

— PREMIUM LINE —



PREMIUM LINE

Lifetime Warranty

RED DOT


RED DOT

RED DOT

RED DOT

RED DOT

RED DOT

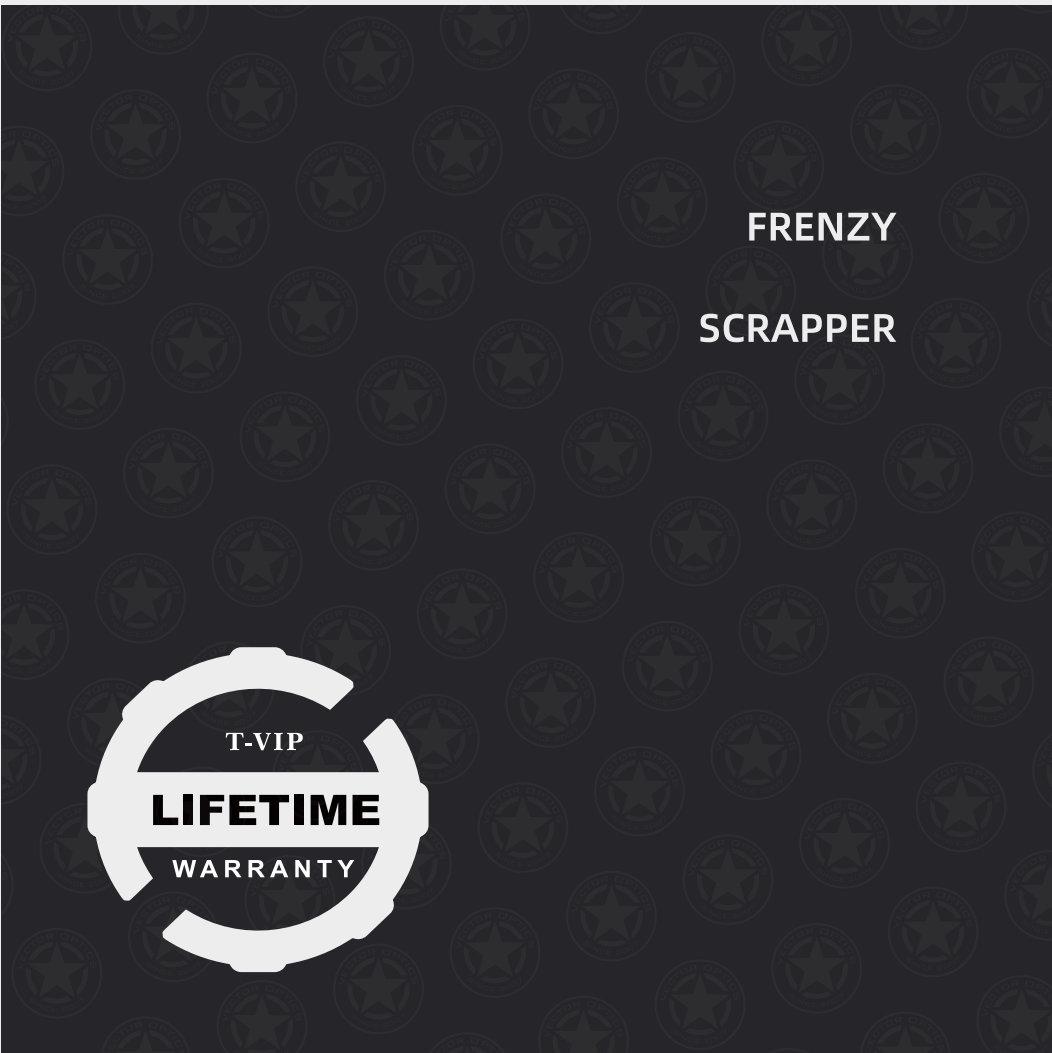

Our Vector Optics Premium lines, including TAURUS, PARAGON, FRENZY, and SCRAPPER, offer exceptional clarity, superior quality, and a lifetime warranty.



These well-crafted products provide an excellent shooting experience and long-lasting durability. Trust in our premium product line's quality and performance, backed by a lifetime warranty.

FRENZY *New*

It's A GenII Pistol Red Dot Sight, No Weak Sight.



1x17x23 SCRD-68	1x17X24 SCRD-73	1x28x19 SCRD-66	
3MOA	3MOA	3MOA	Dot Size
Black Matte	Black Matte	Black Matte	Finish
7075	7075	7075	Housing Material
N/A	Yes	Yes	Aspheric Lens
Yes	N/A	Yes	Motion Sensor
40.8 / 1.6	41 / 1.6	94.6 / 3.72	Length (mm / in)
29 / 1.0	18 / 0.6	94.6 / 3.72	Weight (net) (g / oz)
>45MOA	>45MOA	>45MOA	Elevation Range
>45MOA	>45MOA	>45MOA	Windage Range
MAG™	MAG™	MAG-S™	Footprint
8 levels R & 2NV	8 levels R & 2NV	8 levels R & 2NV	Dot Intensity
CR1632	CR2032	CR2032	Battery Type
Bottom	Side Door	Side Door	Battery Placement
50000	50000	50000	Runtime (Hrs)

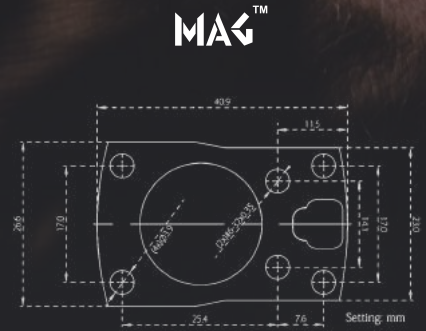

3MOA Red Dot



With Paragon Prism Scope



Offset Picatinny Mount
SCFRM-03



Riser Weaver Mount
SCRA-73

Polymer Weaver Mount
SCFRM-11

FRENZY / 59

FRENZY


High-end sight built with parallax free and premium coating. Up to 50,000 or more-hour battery runtime. Features 3MOA clear red or green dot with IP67 waterproof.



1x17x24
SCRD-19II
○

1x17x24
SCRD-F19II
○

1x17x24
SCRD-G19II
○

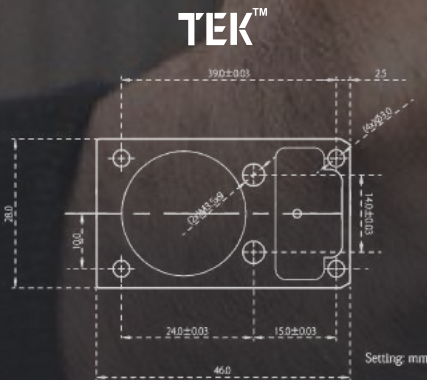


3MOA Red Dot



5MOA Green Dot

Dot Size	3MOA	3MOA	5MOA
Finish	Black Matte	FDE	Black Matte
Housing Material	6061	6061	6061
Auto Light Sensor	N/A	N/A	N/A
Motion Sensor	N/A	N/A	Yes
Length (mm / in)	46 / 1.8	46 / 1.8	46 / 1.8
Weight (net) (g / oz)	26 / 0.9	26 / 0.9	26 / 0.9
Elevation Range	>45MOA	>45MOA	>45MOA
Windage Range	>45MOA	>45MOA	>45MOA
Footprint	TEK™	TEK™	TEK™
Dot Intensity	8 levels R & 2NV	8 levels R & 2NV	8 levels G & 2NV
Battery Type	CR2032	CR2032	CR2032
Battery Placement	Bottom	Bottom	Bottom
Runtime (Hrs)	50000	50000	50000



Dovetail Mount TEK
SCFRM-04



Offset Picatinny Mount
SCFRM-01



Riser Weaver Mount
SCRA-67


60 / FRENZY-X

FRENZY-X

High-end sight built with parallax-free and premium coating. Up to 50k or more-hour battery runtime. Extreme large 20x28mm window size features 6MOA or 3MOA clear red dot with IPX7 waterproof.



TEK™

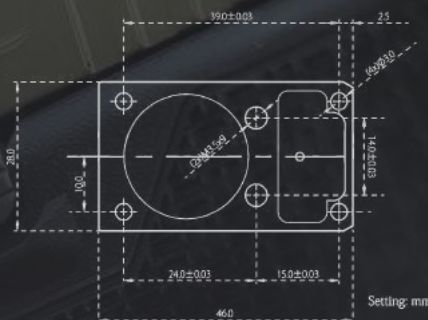

1x20x28
SCRD-35

1x20x28
SCRD-40

3MOA

6MOA

Dot Size

Black Matte

Black Matte

Finish

6061

6061

Housing
Material

N/A

N/A

Auto Light
Sensor

N/A

N/A

Motion
Sensor

46 / 1.8

46 / 1.8

Length
(mm / in)

26 / 1.0

26 / 1.0

Weight (net)
(g / oz)

>45MOA

>45MOA

Elevation
Range

>45MOA

>45MOA

Windage
Range

TEK™

TEK™

Footprint

8 levels R
&
2NV

8 levels R
&
2NV

Dot Intensity

CR2032

CR2032

Battery Type

Bottom


Bottom

Battery
Placement

50000

50000


Runtime
(Hrs)



3MOA Red Dot



6MOA Red Dot



Dovetail Mount TEK
SCFRM-04



Offset Picatinny Mount
SCFRM-01





Riser Weaver Mount
SCRA-67


FRENZY-X / 61

FRENZY-X


High-end sight built with parallax free and premium coating. Up to 50,000 or more-hour battery runtime. Provides versatile options for multi-reticle, motion sensor.

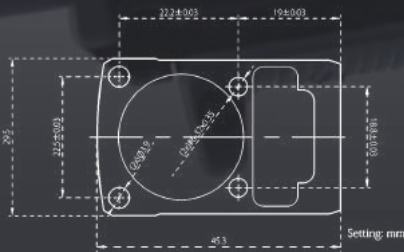

3MOA Red Dot



Crosshair Circle



Dot + Crosshair Circle

	1x22x26 SCRD-36	1x22x26 SCRD-M36	1x22x26 SCRD-37
Reticle	3MOA	Multi-Reticle	3MOA
Finish	Black Matte	Black Matte	Black Matte
Housing Material	6061	6061	6061
Auto Light Sense	N/A	N/A	Yes
Motion Sensor	Yes	Yes	N/A
Length (mm / in)	50 / 2.0	50 / 2.0	50 / 2.0
Weight (net) (g / oz)	30 / 1.1	30 / 1.1	30 / 1.1
Elevation Range	> 45MOA	> 45MOA	> 45MOA
Windage Range	> 45MOA	> 45MOA	> 45MOA
Footprint	MOJ™	MOJ™	MOJ™
Dot Intensity	8 levels R & 2NV	8 levels R & 2NV	8 levels R & 2NV
Battery Type	CR2032	CR2032	CR2032
Battery Placement	Bottom	Bottom	Bottom
Runtime (Hrs)	50000	50000	50000



Offset Picatinny Mount
SCFRM-02



Riser Weaver Mount
SCRA-71

62 / FRENZY-X

FRENZY-X *New*

Aspheric lens minimize the aberration & free of image distortion.
Provide multi-reticle with solar power edition.





1x20x28 GENIII
SCRD-64


1x20x26 GENIII
SCRD-SM64

1x19x28 GENIII
SCRD-T64

3MOA	Multi-Reticle	Multi-Reticle	Reticle
Black Matte	Black Matte	Black Matte	Finish
7075	7075	Ti alloy	Housing Material
Yes	Yes	N/A	Aspheric Lens
Yes	Yes	Yes	Motion Sensor
46 / 1.8	49 / 1.9	48.5 / 1.9	Length (mm / in)
70.4 / 2.48	71.6 / 2.5	86 / 3.0	Weight (net) (g / oz)
> 45MOA	> 45MOA	> 45MOA	Elevation Range
> 45MOA	> 45MOA	> 45MOA	Windage Range
MOJ™	MOJ™	MOJ™	Footprint
11 levels R	11 levels R	11 levels R	Dot Intensity
CR2032	CR2032	CR2032	Battery Type
Side Door	Side Door	Side Door	Battery Placement
50000	50000	50000	Runtime (Hrs)

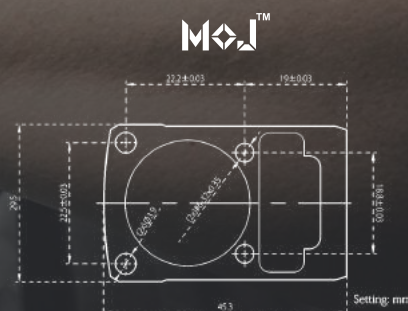

3MOA Red Dot



2MOA Red Dot



Crosshair Circle



Dot + Crosshair Circle



Offset Picatinny Mount
SCFRM-02




Riser Weaver Mount
SCRA-71

FRENZY-S / 63


FRENZY-S




High-end slim profile sight built with parallax free & premium coating. Up to 50,000 or more-hour battery runtime. Provides options for multi-reticle, battery side-load, motion sensor, or auto-light sense with versatile finish options.




3MOA Red Dot



Crosshair Circle



Dot + Crosshair Circle



5MOA Green Dot



With Paragon Prism Scope

	1x17x24 SCRD-43	1x17x24 SCRD-M43	1x17x24 SCRD-G43	1x17x24 SCRD-62
Reticle	3MOA	Multi-Reticle	5MOA	3MOA
Finish	Black Matte	Black Matte	Black Matte	Black Matte
Housing Material	6061	6061	6061	6061
Auto Light Sense	N/A	N/A	N/A	N/A
Motion Sensor	Yes	Yes	Yes	Yes
Length (mm / in)	41 / 1.6	41 / 1.6	41 / 1.6	41 / 1.6
Weight (net) (g / oz)	18 / 0.6	18 / 0.6	18 / 0.6	24 / 0.85
Elevation Range	>45MOA	>45MOA	>45MOA	>45MOA
Windage Range	>45MOA	>45MOA	>45MOA	>45MOA
Footprint	MAG™	MAG™	MAG-S™	MAG-S™
Dot Intensity	8 levels R & 2NV	8 levels R & 2NV	8 levels G & 2NV	8 levels R & 2NV
Battery Type	CR2032	CR2032	CR2032	CR1632
Battery Placement	Bottom	Bottom	Bottom	Side Door
Runtime (Hrs)	50000	20000	40000	30000




Offset Picatinny Mount
SCFRM-03



Riser Weaver Mount
SCRA-73
Polymer Weaver Mount
SCFRM-11

FRENZY-PLUS

Full support for all conditions, whether in sand, rain, or snow. It features a motion sensor & provides multi-reticle & solar power edition — versatile accessories for different pistol platforms and picatinny rail.

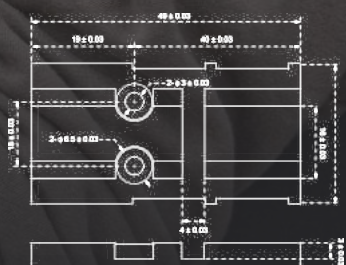

1x18x20
SCRD-63




1x18x20
SCRD-F63




1x18x20
SCRD-SM63




3MOA	3MOA	Multi-Reticle	Reticle
Black Matte	FDE	Black Matte	Finish
6061	6061	6061	Housing Material
N/A	N/A	N/A	Auto Light Sensor
Yes	Yes	Yes	Motion Sensor
46 / 1.8	46 / 1.8	46 / 1.8	Length (mm / in)
81 / 2.9	81 / 2.9	81 / 2.9	Weight (net) (g / oz)
>45MOA	>45MOA	>45MOA	Elevation Range
>45MOA	>45MOA	>45MOA	Windage Range
			Footprint
8 levels R & 2NV	8 levels R & 2NV	8 levels R & 2NV	Dot Intensity
CR2032	CR2032	CR2032	Battery Type
Side Door	Side Door	Side Door	Battery Placement
50000	50000	50000	Runtime (Hrs)



3MOA Red Dot



Crosshair Circle



Dot + Crosshair Circle

VOD

FOOTPRINT



- MOS to VOD Adapter
SCFRM-12



- MOJ to VOD Adapter
SCFRM-13



- CZ Shadow 2 VOD Adapter
SCFRM-18



- VOD Red Dot Low Weaver Mount
SCFRM-14



- Riser Weaver Mount
SCFRM-15



- Low Dovetail Mount
SCFRM-17



FRENZY-PLUS

Battery side-loading & audible click 1MOA adjustment provide multi-reticle with solar power edition, deal for shotgun and carbine platform.

1x22x32 New
SCRD-SM44

1x22x32 New
SCRD-65



Multi-Reticle

6MOA

Reticle

Black Matte

Black Matte

Finish

6061

6061

Housing
Material

Yes

N/A

Solar
Power

Yes

Yes

Motion
Sensor

53 / 2.08

53 / 2.08

Length
(mm / in)

113 / 3.96

112 / 3.96

Weight (net)
(g / oz)

>50MOA

>50MOA

Elevation
Range

>50MOA

>50MOA

Windage
Range

Quick Release

Quick Release

Mount Type

8 levels **R**
&
2NV

8 levels **R**
&
2NV

Dot Intensity

CR2032

CR2032

Battery Type

Side Door


Side Door

Battery
Placement


80000

30000

Runtime
(Hrs)



3MOA Red Dot



6MOA Red Dot




Crosshair Circle



Dot + Crosshair Circle

New FRENZY-PLUS


All weather conditions in heavy-duty construction. It features a motion sensor & IP67 waterproof. Provide multi-reticle with solar power edition. Skeleton armor shroud with quick release mount.

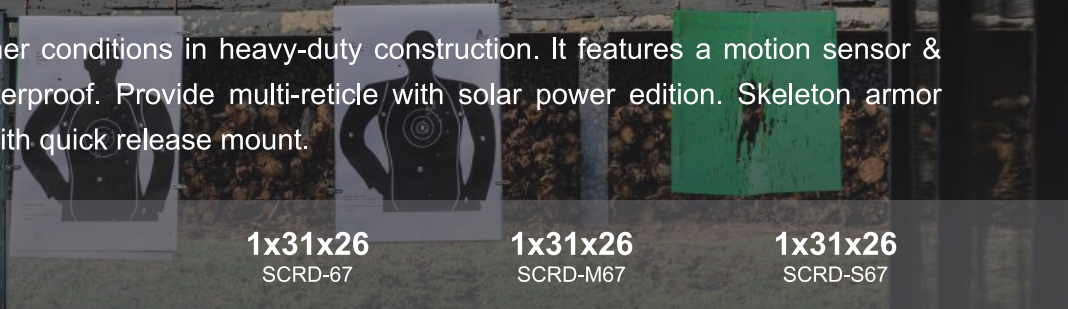

1x31x26
SCRD-67

1x31x26
SCRD-M67


1x31x26
SCRD-S67



3MOA RED Dot



Standard Crosshair



Crosshair Circle



Dot + Crosshair Circle



Reticle	3MOA	Multi-Reticle	3MOA
Finish	Black Matte	Black Matte	Black Matte
Housing Material	6061	6061	6061
Auto Light Sensor	N/A	N/A	N/A
Motion Sensor	Yes	Yes	Yes
Length (mm / in)	94.6 / 3.72	94.6 / 3.72	94.6 / 3.72
Weight (net) (g / oz)	298 / 10.5	298 / 10.5	298 / 10.5
Elevation Range	>45MOA	>45MOA	>45MOA
Windage Range	>45MOA	>45MOA	>45MOA
Mount Type	Quick Release	Quick Release	Quick Release
Dot Intensity	8 levels R & 2NV	8 levels R & 2NV	8 levels R & 2NV
Battery Type	AAAx2	AAAx2	AAAx2
Battery Placement	Front	Front	Front
Runtime (Hrs)	50000	50000	50000

SCRAPPER


Compact, rugged, lightweight construction with IP67 waterproof. Direct bulb RCLED & US made chip ensure the dot clear and easy to see for rapid acquisition of targets.



RUM™

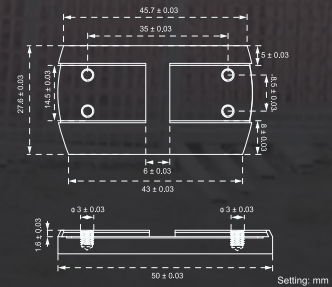

3MOA Red Dot





Crosshair Circle



Dot + Crosshair Circle

1x22 SCRD-45	1x25 SCRD-46	1x29 SCRD-47	1x22 SCRD-SM45	1x25 SCRD-SM46	
3MOA	3MOA	3MOA	Multi-Reticle	Multi-Reticle	Reticle
Black Matte	Black Matte	Black Matte	Black Matte	Black Matte	Finish
6061-T6	6061-T6	6061-T6	6061-T6	6061-T6	Housing Material
N/A	N/A	N/A	Yes	Yes	Solar Power
Yes	Yes	Yes	Yes	Yes	Motion Sensor
64 / 2.5	70 / 2.7	80 / 3.1	65 / 2.52	60 / 2.52	Length (mm / inch)
140 / 4.9	190 / 6.7	200 / 7.1	143 / 5.0	143 / 5.0	Weight (net) (g / oz)
>45MOA	>45MOA	>45MOA	>45MOA	>45MOA	Elevation Range
>45MOA	>45MOA	>45MOA	>45MOA	>45MOA	Windage Range
Picatinny Mount					Mount Type
8 levels R & 2NV	8 levels R & 2NV	8 levels R & 2NV	8 levels R & 2NV	8 levels R & 2NV	Dot Intensity
CR2032	CR2032	CR2032	CR2032	CR2032	Battery Type
40.4 / 1.59	36 / 1.42	27.5 / 1.0	40.4 / 1.59	36 / 1.42	Center Hight (mm / in)
Maverick 3x26 & 4x26 & 5x26 & 3x22 Paragon 5x30 SCMF-10 SCMF-11 SCMF-14 SCMF-15 SCMF-31 SCMF-32 SCMF-34					Compatible Magnifier

SCRAPPER MICRO

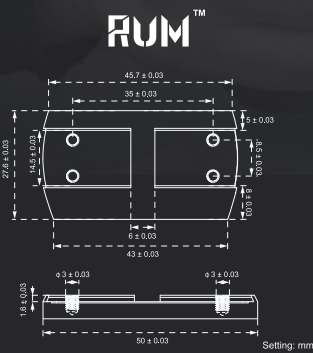

3MOA Red Dot

	1x20 SCRD-69 ○	1x25 SCRD-74 ○
Reticle	3MOA	3MOA
Finish	Black Matte	Black Matte
Housing Material	7075 T6	7075 T6
Solar Power	N/A	N/A
Motion Sensor	Yes	Yes
Length (mm / inch)	47 / 1.85	60 / 2.36
Weight (net) (g / oz)	123 / 4.33	287 / 10.12
Elevation Range	>45MOA	>45MOA
Windage Range	>45MOA	>45MOA
Mount Type	Picatinny Mount	
Dot Intensity	8 levels R & 2NV	8 levels R & 2NV
Battery Type	CR2032	CR2032
Center Hight (mm / in)	40.4 / 1.57	40.4 / 1.57
Compatible Magnifier	Maverick 3x26 & 4x26 & 5x26 & 3x22 Paragon 5x30 SCMF-10 SCMF-11 SCMF-14 SCMF-15 SCMF-31 SCMF-32 SCMF-34	

— CLASSIC LINE



CLASSIC LINE

5-year Warranty

RED DOT

RED DOT

RED DOT

RED DOT

RED DOT

RED DOT



NAUTILUS
CENTURION



Our Classic product line is the ideal choice for those looking for a reliable option that offers a balance of performance and affordability.

These products come with a reassuring 5-year warranty, providing peace of mind throughout your shooting adventures.

72 / NAUTILUS

NAUTILUS


Closed red dot scope by using AAA battery with Quick Release Mount.



1x30
SCRD-26II
○

1x30
SCRD-D26
○

3MOA	Double Reticles	Reticle
Black Matte	Black Matte	Finish
6061	6061	Housing Material
Yes	N/A	Auto Light Sensor
N/A	Yes	Motion Sensor
110 / 4.3	98 / 3.9	Length (mm / in)
270 / 9.5	270 / 9.5	Weight (net) (g / oz)
>60MOA	>60MOA	Elevation Range
>60MOA	>60MOA	Windage Range
Picatinny Quick Release		Mount Type
11 levels R	7 levels R & 2NV	Dot Intensity
AAA	AAA	Battery Type
38 / 1.5	38 / 1.5	Center Hight (mm / in)
Maverick 3x26 & 4x26 & 5x26 & 3x22 Paragon 5x30 SCMF-10 SCMF-11 SCMF-14 SCMF-15 SCMF-31 SCMF-32 SCMF-34		Compatible Magnifier



3MOA Red Dot




Circle + Crosshair Dot

CENTURION

Up to 20000 hours battery runtime red dot scope for AR platform.



	1x20 SCR-D-33	1x30 SCR-D-34
Reticle	3MOA	3MOA
Finish	Black Matte	Black Matte
Body Material	6061	6061
Auto Light Sensor	N/A	N/A
Runtime	40,000 Hours	20,000 Hours
Length (mm / in)	69 / 2.7	67 / 2.6
Weight (net) (g / oz)	175 / 6.2	170 / 6.0
Elevation Range	60MOA	60MOA
Windage Range	60MOA	60MOA
Mount Type	Picatinny Riser Mount	
Dot Intensity	7 levels R & 1NV	7 levels R & 1NV
Battery Type	AAA	CR2032



3MOA Red Dot

— ENTRY LINE —



ENTRY LINE

5-year Warranty

RED DOT

RED DOT

RED DOT

RED DOT

RED DOT

RED DOT



MAVERICK

OMEGA



Our entry-level product line is perfect for beginners and casual shooters who prioritize affordability without compromising on quality.

These products provide a great starting point and come with the added assurance of a generous 5-year warranty.


MAVERICK-II

Most sold 3MOA red dot scope with direct 1MOA turret adjustment. Come with a picatinny quick release riser mount for the AR platform and a low picatinny mount for your other tactical or hunting calibers.




1x22 SCRD-12II	1x22 SCRD-GY12	1x22 SCRD-PS12	1x22 SCRD-PD12	1x25 <small>New</small> SCRD-72
--------------------------	--------------------------	--------------------------	--------------------------	---

3MOA	3MOA	3MOA	Double Reticles	3MOA	Reticle
Black	Graphite Finish	Black	Black	Black	Finish
6061	6061	6061	6061	6061	Body Material
N/A	N/A	Yes	N/A	N/A	Solar Power
N/A	N/A	N/A	Yes	Yes	Motion Sensor
76 / 3.0	76 / 3.0	76 / 3.0	76 / 3.0	92 / 3.62	Length (mm / in)
185 / 6.5	185 / 6.5	185 / 6.5	185 / 6.5	212 / 7.5	Weight (net) (g / oz)
>45MOA	>45MOA	>45MOA	>45MOA	>45MOA	Elevation Range
>45MOA	>45MOA	>45MOA	>45MOA	>45MOA	Windage Range
Picatinny Quick Release Riser Mount & Lower Weaver Mount					Mount Type
11 levels R	11 levels R	7 levels R & 1NV	8 levels R & 1NV	6 levels R	Dot Intensity
CR2032	CR2032	CR2032	CR2032	CR2032	Battery Type
38 / 1.5	38 / 1.5	38 / 1.5	38 / 1.5	38 / 1.5	Center Hight (mm / inch)
Maverick 3x26 & 4x26 & 5x26 & 3x22 Paragon 5x30 SCMF-10 SCMF-11 SCMF-14 SCMF-15 SCMF-31 SCMF-32 SCMF-34					Compatible Magnifier



3MOA Red Dot




Dot + Crosshair Circle

MAVERICK-III

3MOA red dot scope with capped 1MOA adjustment, lightweight solid construction, and rubber armor provide great protection for red dot scope.



	1x22 SCRD-41 ○	1x22 SCRD-42 ○	1x22 SCRD-38 ○	1x22 SCRD-39 ○
Reticle	3MOA	3MOA	3MOA	3MOA
Finish	Black	Rubber Armor	Black	Rubber Armor
Body Material	6061	6061	6061	6061
Auto Light Sensor	N/A	N/A	N/A	N/A
Motion Sensor	N/A	N/A	N/A	N/A
Length (mm / in)	76 / 3.0	76 / 3.0	76 / 3.0	76 / 3.0
Weight (net) (g / oz)	185 / 6.5	185 / 6.5	185 / 6.5	185 / 6.5
Elevation Range	>45MOA	>45MOA	>45MOA	>45MOA
Windage Range	>45MOA	>45MOA	>45MOA	>45MOA
Mount Type	Picatinny Riser Mount & Lower Weaver Mount		Picatinny Quick Release Riser Mount & Lower Weaver Mount	
Dot Intensity	11 levels R	11 levels R	11 levels R	11 levels R
Battery Type	CR2032	CR2032	CR2032	CR2032
Center Hight (mm / in)	41 / 1.6	41 / 1.6	41 / 1.6	41 / 1.6
Compatible Magnifier	Maverick-III 3x22 (SCMF-31 SCMF-32)			



3MOA Red Dot

78

/ MAVERICK-IV

MAVERICK-IV


The most compact red dot scope in the Maverick line. Feature 3MOA dot size & premium coating lens.



1x20
SCRD-60
○

1x20
SCRD-61
○

3MOA	3MOA	Reticle
Black Rubber Armored	FDE Rubber Armor	Finish
6061	6061	Body Material
N/A	N/A	Auto Light Sensor
N/A	N/A	Motion Sensor
68 / 2.7	68 / 2.7	Length (mm / in)
140 / 4.9	140 / 4.9	Weight (net) (g / oz)
>45MOA	>45MOA	Elevation Range
>45MOA	>45MOA	Windage Range
Picatinny Quick Release Mount & Lower Mount		Mount Type
10 levels R	10 levels R	Dot Intensity
CR2032	CR2032	Battery Type
41 / 1.6	41 / 1.6	Center Hight (mm / in)
Maverick 3x26 (SCMF-11)		Compatible Magnifier



3MOA Red Dot

MAVERICK


Accessories



MAV-QD10


0.8" Profile Cantilever QD Riser Mount

Fit Maverick & Scrapper Red Dot Scope



0.5" Profile Cantilever Picatinny Riser Mount

MAV-P05



0.83" Profile Cantilever Picatinny Riser Mount

MAV-P08



1.0" Profile Cantilever Picatinny Riser Mount

MAV-P10



1.5" Profile Cantilever Picatinny Riser Mount

MAV-P15



Low Profile Dovetail Mount

MAV-DL


AND MORE...



80 / OMEGA


OMEGA

Multi-reticle open reflex sight with green / red illumination and picatinny quick release mount for AR platform.

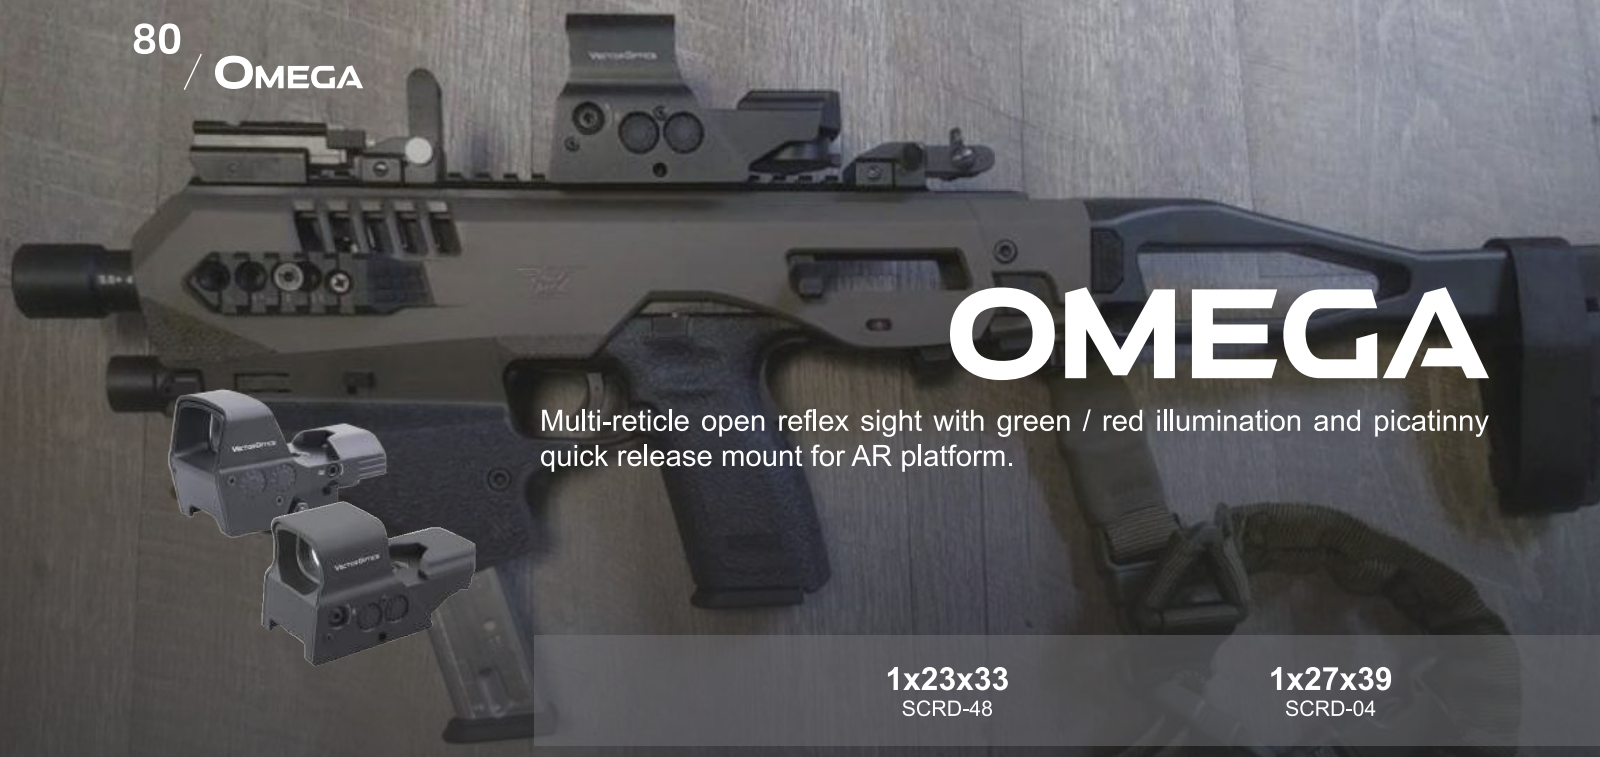

1x23x33
SCRD-48

1x27x39
SCRD-04

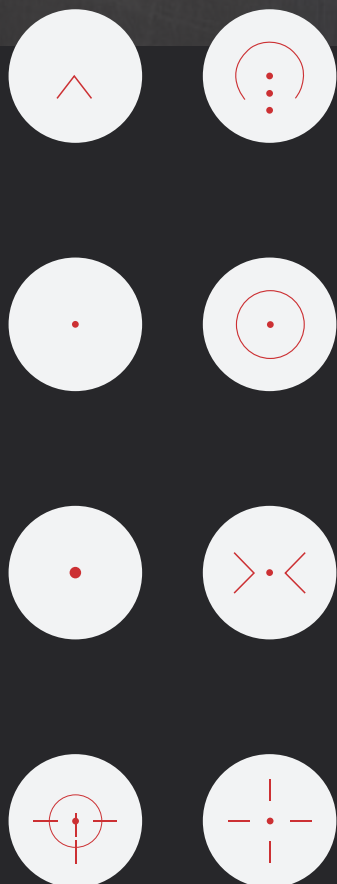

Reticle	Four-Reticle	Eight-Reticle
Finish	Black Matte	Black Matte
Housing Material	6061	6061
Auto Light Sensor	N/A	N/A
Motion Sensor	N/A	N/A
Length (mm / in)	88 / 3.5	110 / 4.1
Weight (net) (g / oz)	190 / 6.7	260 / 9.2
Elevation Range	80MOA	>60MOA
Windage Range	80MOA	>60MOA
Mount Type	Picatinny Quick Release	
Dot Intensity	6 levels R & G	6 levels R & G
Battery Type	CR2032	CR2032



HK 416 D
Cal. 5.56 mm x 45

HK

88-081699

VECTOR OPTICS

88-081699

30

30

A close-up photograph of a dark grey optical device, possibly a spotting scope or range finder, mounted on a wooden handle. The device features a yellow logo with a stylized 'V' and 'E' inside a circle. A small circular dial with the letter 'R' is visible on the right side. The background is a blurred, rocky surface.

OTHER OPTICS

Magnifier, Spotting Scope, Range Finder, Monocular, Binocular



070015322021

84
/ PARAGON

PARAGON

MAGNIFIER



3x18
SCMF-33

5x30
SCMF-34



Magnification

3x

5x

**Objective
Lens Dia (mm)**

18

30

**Exit Pupil
(mm)**

6.0

6.0

**F.O.V
(ft @100yds)**

39

23

**F.O.V
(m @100meters)**

11.9

7.0

**Eye Relief
(mm / in)**

67 / 2.6

67 / 2.6

**Length
(mm / in)**

70 / 2.8

93 / 3.7

**Weight
(net)(g/oz)**

215 / 7.6

250 / 8.8

**Center Height
(mm / in)**

36 / 1.4

36 / 1.4



MAGNIFIER

MAVERICK



3x26
SCMF-10

3x26
SCMF-11

4x26
SCMF-14

5x26
SCMF-15

3x22
SCMF-31

3x22
SCMF-32



Magnification	3x	3x	4x	5x	3x	3x
Objective Lens Dia (mm)	26	26	26	26	22	22
Exit Pupil (mm)	7.0	7.0	6.5	6.5	7.0	7.0
F.O.V (ft @100yds)	49	49	26	20.3	49	49
F.O.V (m @100meters)	14.9	14.9	7.9	6.2	14.9	14.9
Eye Relief (mm / in)	60 / 2.4	60 / 2.4	75 / 3.0	70 / 2.8	69 / 2.7	69 / 2.7
Length (mm / in)	108 / 4.2	108 / 4.2	115 / 4.5	118 / 4.6	103 / 4.1	103 / 4.1
Weight (net)(g/oz)	325 / 11.7	440 / 15.5	230 / 8.1	230 / 8.1	290 / 10.2	290 / 10.2
Center Height (mm / in)	36 / 1.4	39 / 1.5	36 / 1.4	36 / 1.4	36 / 1.4	36 / 1.4

New CONTINENTAL PRO

Spotting Scope



First Focal Plane



ED Glass
(Extra-Low Dispersion)



Fully Multi-Coated



IP67 Water Proof



SCSS-03

20-60x80



SPOTTING SCOPE



Forester 20-60x60 SCSS-01

Length (mm / in) : 350 / 13.8
Weight (net) (g / oz) : 730 / 25.8

Material	Focus Type	Exit Pupil (mm)	Field of View (ft @100yds)	Field of View (m @100m)	Eye Relief (mm / inch)
ABS Body	Prismatic	3.0-1.0	10.0-5.0	3.0-1.6	16.5-13 / 0.65-0.51



New

Continental 12-40x60 SCSS-02 PRO

Length (mm / in) : 318 / 13.38
Weight (net) (g / oz) : 1661 / 58.59

Material	Focus Type	Exit Pupil (mm)	Field of View (ft @100yds)	Field of View (m @100m)	Eye Relief (mm / inch)
Mg-Alu Alloy Body	Focus Ring	3.0-1.0	17.7-5.7	5.9-1.9	30 / 1.18



New

Continental 20-60x80 SCSS-03 PRO

Length (mm / in) : 390 / 15.35
Weight (net) (g / oz) : 2215 / 78.13

Material	Focus Type	Exit Pupil (mm)	Field of View (ft @100yds)	Field of View (m @100m)	Eye Relief (mm / inch)
Mg-Alu Alloy Body	Focus Ring	4.0-1.3	12.0-4.2	4.0-1.4	30 / 1.18



New

Paragon 8-24x56 SCSS-10

Length (mm / in) : 185 / 7.3
Weight (net) (g / oz) : 673 / 23.7

Material	Focus Type	Exit Pupil (mm)	Field of View (ft @100yds)	Field of View (m @100m)	Eye Relief (mm / inch)
Rubber Covered	Focus Ring	6.2-2.1	25.8-13.2	8.6-4.4	20.0-16.7 / 0.79-0.65




New

Paragon 9-27x56 SCSS-11

Length (mm / in) : 196 / 7.7
Weight (net) (g / oz) : 729 / 25.7

Material	Focus Type	Exit Pupil (mm)	Field of View (ft @100yds)	Field of View (m @100m)	Eye Relief (mm / inch)
Rubber Covered	Focus Ring	6.2-2.1	24.1-12	8.0-4.0	20.0-16.7 / 0.79-0.65

RANGE FINDER

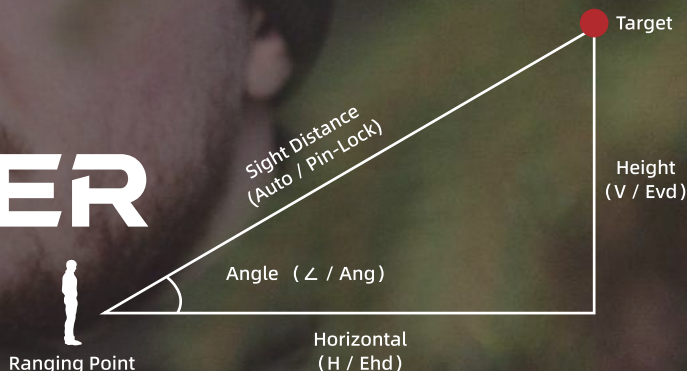

Forester 6x21 | SCRF-16 (3 modes)

Ranging Distance (m/ yds)	Ranging Response Time (s)	Exit Pupil (mm)	Field of View	Display	Size (mm / inch)	Weight (net) (g / oz)	Battery Type
5-1500 / 5-1600	0.25	15	6°	OLED	98.5x77x37 / 3.8x3x1.4	130 / 4.6	CR2-3V

Paragon 6x25 GENII | SCRF-20 (3 modes)

Ranging Distance (m/ yds)	Ranging Response Time (s)	Exit Pupil (mm)	Field of View	Display	Size (mm / inch)	Weight (net) (g / oz)	Battery Type
5-1850 / 5-2000	0.25S	14	7°	LCD	105x76x42 / 4.1x3x1.6	180 / 6.3	CR2-3V



Paragon 6x25 GENIII BDC | SCRF-S20 (4 modes)

APPLIED BALLISTICS Digital Ballistic

Ranging Distance (m/ yds)	Ranging Response Time (s)	Exit Pupil (mm)	Field of View	Display	Size (mm / inch)	Weight (net) (g / oz)	Battery Type
5-1850 / 5-2000	0.25S	14	7°	OLED	105x76x42 / 4.1x3x1.6	140 / 4.9	CR2-3V

Paragon 7x24 GENIII BDC | SCRF-S24 (4 modes)

APPLIED BALLISTICS Digital Ballistic

Ranging Distance (m/ yds)	Ranging Response Time (s)	Exit Pupil (mm)	Field of View	Display	Size (mm / inch)	Weight (net) (g / oz)	Battery Type
5-2194 / 5-2400	0.15	14	7°	OLED	118x76x42 / 4.65x3x1.6	184 / 6.49	CR2-3V




MONOCULAR

Paragon 8x42 SCMO-01

Length (mm / in) : 141 / 5.55
Weight (net) (g / oz) : 388 / 13.69

Prism Type	Focus Type	Objective Lens Dia (mm /in)	Field of View (ft @100yds)	Field of View (m @100m)	Resolution
BAK4 Roof Prism	Manual	42 / 1.65	37.8	12.6	5.6"

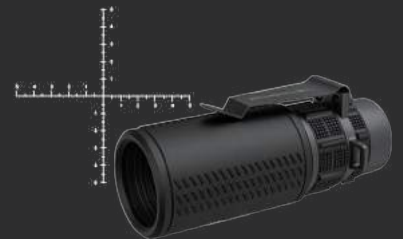

Forester 10x50 ED SCMO-02


Length (mm / inch) : 163 / 6.42
Weight (net) (g / oz) : 470 / 46.58

Prism Type	Focus Type	Objective Lens Dia (mm /in)	Field of View (ft @100yds)	Field of View (m @100m)	Resolution
BAK4 Roof Prism	Manual	50 / 1.97	31.5	10.5	4.5"

New Forester 8x32 SCMO-03

Length (mm / in) : 130 / 5.11
Weight (net) (g / oz) : 190 / 0.67

Prism Type	Focus Type	Objective Lens Dia (mm /in)	Field of View (ft @100yds)	Field of View (m @100m)	Resolution
BAK4 Roof Prism	Manual	32 / 1.25	41.7	13.9	7.32"

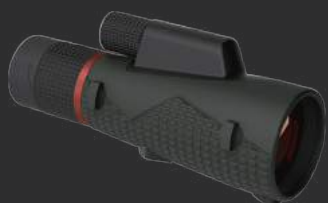

Forester 8-16x56 SCMO-04

Length (mm / in) : 193 / 7.6
Weight (net) (g / oz) : 491 / 1.08

Prism Type	Focus Type	Objective Lens Dia (mm /in)	Field of View (ft @100yds)	Field of View (m @100m)	Resolution
BAK4 Roof Prism	Manual	56 / 2.2	22.5-15.6	7.9-5.5	5"

90

/ CONTINENTAL

BINOCULAR



10x42 ED

8x42 ED

SKU	Name	Prism Type	Focus Type	Field of View (m @1000m / ft @1000yds)	Objective Lens Dia (mm / in)	Dimensions (mm / inch)	Weight (net) (g / oz)	Exit Pupil (mm)
SCBO-05	8x42 ED	BAK4 Roof Prism	Center	142 / 426	42 / 1.65	147x55x130 / 5.7x2.1x5.1	840 / 29.6	5.25
SCBO-06	10x42 ED	BAK4 Roof Prism	Center	131 / 366	42 / 1.65	147x55x130 / 5.7x2.1x5.1	840 / 29.6	4.2
SCBO-07	10x42 ED (Reticle)	BAK4 Roof Prism	Center	131 / 366	42 / 1.65	147x55x130 / 5.7x2.1x5.1	804 / 28.4	4.2
New SCBO-08	12x50 ED	BAK4 Roof Prism	Center	94 / 282	50 / 1.96	140x60x176 / 5.5x2.36x6.92	1230 / 43.4	4.17
New SCBO-09	15x56 ED	BAK4 Roof Prism	Center	70 / 210	56 / 2.2	190x160x68 / 7.48x6.29x2.67	1410 / 49.7	3.7
New SCBO-10	8x56 ED	BAK4 Roof Prism	Center	126 / 378	56 / 2.2	190x160x68 / 7.48x6.29x2.67	1200 / 42.3	7
New SCBO-14	8x42 ED (OD Green)	BAK4 Roof Prism	Center	142 / 426	42 / 1.65	147x55x130 / 5.7x2.1x5.1	840 / 29.6	5.25
New SCBO-15	10x42 ED (OD Green)	BAK4 Roof Prism	Center	131 / 366	42 / 1.65	147x55x130 / 5.7x2.1x5.1	840 / 29.6	4.2

BINOCULAR



8x42 ED

10x42 ED

SKU	Name	Prism Type	Focus Type	Field of View (m @1000m / ft @1000yds)	Objective diameter (mm)	Dimensions (mm / inch)	Weight (net) (g / oz)	Exit Pupil (mm)
SCBO-03	8x42	Roof Prism	Center	116 / 347	42	146x54x128 / 5.7x2.1x5.0	685 / 24.2	5.1
SCBO-04	10x42	Roof Prism	Center	131 / 366	42	146x54x128 / 5.7x2.1x5.0	675 / 23.8	4.1
New SCBO-12	8x42	Roof Prism	Center	108 / 323	42	150x54x114 / 5.9x2.1x4.5	585 / 20.6	5.25
New SCBO-13	10x42	Roof Prism	Center	100 / 299	42	150x54x114 / 5.9x2.1x4.5	582 / 20.5	4.2

BINOCULAR



SKU	Name	Prism Type	Focus Type	Field of View (m @1000m / ft @1000yds)	Objective diameter (mm)	Dimensions (mm / inch)	Weight (net) (g / oz)	Exit Pupil (mm)
SCBO-01	8x42	Roof	Center	113 / 338	42	147x53x126 / 5.7x2.0x4.9	620 / 21.9	5.1
SCBO-02	10x42	Roof	Center	102 / 303	42	147x53x126 / 5.8x2.0x4.9	620 / 21.9	4.1
New SCBO-16	7x50	Porro	Center	122 / 366	50	179x190x62 / 7.0x7.4x2.44	850 / 30	7.1
New SCBO-17	10x50	Porro	Center	113 / 340	50	179x190x62 / 7.0x7.4x2.44	850 / 30	5
New SCBO-18	12x50	Porro	Center	101 / 303	50	179x190x62 / 7.0x7.4x2.44	850 / 30	4.1





VICTOPTICS

Qualified products, practical functions, competitive price

VICTOPTICS





6x Zoom



Shock Proof




FMC



Turret Lock



30mm Tube



Nitrogen Purged

S6

SERIES

FEATURE

1-6x24 | 1-6x24i

- ▶ 30mm Monotube
- ▶ Edge-to-Edge Clarity
- ▶ Turret Lock Feature
- ▶ R & G Illumination
- ▶ Fully Multi-coated
- ▶ Wide Field of View


SFP

1-6x24 | 1-6x24 FDE OP SL22 | OP SL23

Low Power Variable Optic
5 Levels R & G Illumination
1/5MIL Adjustment with Turret Lock Feature




Available in Coyote FDE



SFP

1-6x24i Fiber OP SL33

Low Power Variable Optic
6 Levels R Illumination
Fiber Center Dot Reticle
1/5MIL Adjustment with Turret Lock Feature

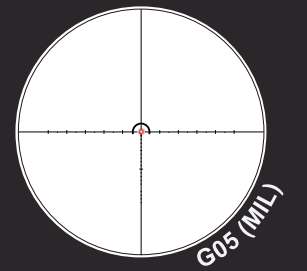

PRODUCT SPECS

SKU	Magnification	Objective Lens Dia	Exit Pupil (mm)	F.O.V (ft @100yds)	Eye Relief (mm / in)	Length (mm / in)	Weight (net)(g / oz)	Tube	Elevation Range	Windage Range	Click Value	Parallax Adjustment	Reticle	Illumination
OPSL22													VI-CTSIX	5 levels R & G
OPSL23	1-6x	24mm	16.0 / 4.0	109.2 / 18.2	101 / 4.0	249 / 9.8	425 / 15.0	30mm	> 50MIL	> 50MIL	1/5MIL	100yds		
OPSL33													G05 MIL	6 levels R



Brian, USA

The S6 packs a lot into an affordable package. It's incredibly versatile and easy to use both up close and far away. The reticle is great for CQB and distance shooting. The glass is clear and the eye box and eye relief are forgiving.

4x
ZOOM

4x Zoom



Shock Proof



FMC



Turret Lock

30
MM

30mm Tube

N₂

Nitrogen Purged

S4

SERIES


FEATURE

1.5-6x28 | 3-12x40 | 4-16x44 | 6-24x50

- ▶ 30mm Monotube
- ▶ Edge-to-Edge Clarity
- ▶ Turret Lock Feature
- ▶ Fully Multi-coated
- ▶ Wide Field of View

A1

4x20 OPSL07 (4x15 & 3-7x20 Available)
19mm Tube | Multi Coated | Weaver or Dovetail Mount




A1

4x32 OPSL19
1" (25.4mm) Tube | Multi Coated | 1/4MOA Adjustment



A3

2-6x32 OPSL09
1" (25.4mm) Tube | 5 Levels R & G | 1/4MOA Adjustment



B1

4x32C OPSL25
1" (25.4mm) Tube | Multi Coated | 1/4MOA Adjustment




PRODUCT SPECS

SKU	Magnification	Objective Lens Dia	Exit Pupil (mm)	F.O.V (ft @100yds)	Eye Relief (mm / in)	Length (mm / in)	Weight (net)(g / oz)	Tube	Elevation Range	Windage Range	Click Value	Parallax Adjustment	Reticle	Illumination
OPSL07_SFP	4x	20mm	5.0	36.6	75 / 3.0	270 / 10.6	100 / 3.5	19mm	40MOA	40MOA	N/A	100yds	Duplex	N/A
OPSL19_SFP			7.5	30.4	80-70 / 3.1-2.8	292 / 11.5	280 / 11.0		90MOA	90MOA				
OPSL09_SFP	2-6x	32mm	4.6-14.0	15.7-42.0	75-95 / 3.0-3.7	210 / 8.3	360 / 12.7	1" 25.4mm	60MOA	60MOA	1/4MOA	10yds to ∞	R14 Ranging	5 levels R & G
OPSL25_SFP	4x		7.5	33.7	90 / 3.5	191 / 7.5	230 / 8.1		90MOA	90MOA	100yds			N/A

B3

3-9x40 OPSL20

1" (25.4mm) Tube | Multi Coated | 1/4MOA Adjustment




C1

4x32 OPSL12 | OPSL14

Fully Multi-coated | 1/4MOA Adjustment
Etched Glass BDC Reticle



3 Different Color R & G & B



C3

3-9x32 OPSL28

1" (25.4mm) Tube | Turret Lock | R & G Illumination




PRODUCT SPECS

SKU	Magnification	Objective Lens Dia	Exit Pupil (mm)	F.O.V (ft @100yds)	Eye Relief (mm / in)	Length (mm / in)	Weight (net)(g / oz)	Tube	Elevation Range	Windage Range	Click Value	Parallax Adjustment	Reticle	Illumination
OPSL20 _{SFP}	3-9x	40mm	13.3-4.4	34.6-12.6	78 / 3.1	310 / 12.2	370 / 13.0	1" 25.4mm	120MOA	120MOA	1/4MOA	100yds	VMD-2	N/A
OPSL28 _{SFP}		32mm	10.6-3.8	37.0-12.5	120-76 / 4.0-3.0	208 / 83.2	380 / 13.4					10yds to ∞	MIL-DOT	Stepless R & G
OPSL12 _{SFP}	4x	32mm	8.0	36.6	50 / 2.0	145 / 5.7	465 / 16.4	N/A	70MOA	70MOA	1/4MOA	100yds	Chevron	R & G & B
OPSL14 _{SFP}														

C4

3-12x40 OP SL29


1" (25.4mm) Tube | Fully Multi-coated | Objective Lens Focus



C4

10-40x50 OP SL24


1" (25.4mm) Tube | Fully Multi-coated | Objective Lens Focus



X4

1-4x20 OP SL18 | OP SL21


1" (25.4mm) Tube | Fully Multi-coated



SCB

2-5x24IR OP SL30


30mm Tube | BDC Crossbow Reticle | 5 levels R & G



PRODUCT SPECS

SKU	Magnification	Objective Lens Dia	Exit Pupil (mm)	F.O.V (ft @100yds)	Eye Relief (mm / in)	Length (mm / in)	Weight (net)(g / oz)	Tube	Elevation Range	Windage Range	Click Value	Parallax Adjustment	Reticle	Illumination
OPSL18 SFP	1-4x	20mm	20.0-5.0	68.0-23.8	112-94 / 4.4-3.7	235 / 9.3	300 / 10.6	1" 25.4mm	180MOA	180MOA	1/2MOA	50yds	VMD-2	N/A
OPSL21 SFP														5 levels R & G
OPSL29 SFP	3-12x	40mm	13.3-3.3	35.0-11.6	100 / 40	332 / 13.0	510 / 18.0		60MOA	60MOA	1/4MOA	10yds to ∞	R14 Ranging	N/A
OPSL24 SFP	10-40x	50mm	5.0-1.3	9.4-2.6	92 / 3.6	420 / 16.5	610 / 21.5		35MOA	35MOA	1/8MOA	25yds to ∞		
OPSL30 SFP	2-5x	24mm	10.7-4.8	63.7-25.5	96 / 3.8	248 / 9.8	380 / 13.4	30mm	60MOA	60MOA	1/2MOA	30yds	VCB-CDO	5 levels R & G

SOI ^{New} **1.5-5x20** VIOC-01
 1" (25.4mm) Tube | Fully Multi Coated | 5 Levels R & G



SOI ^{New} **2-7x32** VIOC-02
 1" (25.4mm) Tube | Fully Multi Coated | 5 Levels R & G



SOI ^{New} **3-9x40** VIOC-03
 1" (25.4mm) Tube | Fully Multi Coated | 5 Levels R & G



SOI ^{New} **4-12x40** VIOC-04
 1" (25.4mm) Tube | Multi Coated | 5 Levels R & G



PRODUCT SPECS

SKU	Magnification	Objective Lens Dia	Exit Pupil (mm)	F.O.V (ft @100yds)	Eye Relief (mm / in)	Length (mm / in)	Weight (net)(g / oz)	Tube	Elevation Range	Windage Range	Click Value	Parallax Adjustment	Reticle	Illumination
VIOC-01 _{SFP}	1.5-5x	20mm	13.3-4.0	84.9-25.5		218 / 8.6	225 / 7.9	1" 25.4mm	35MIL	35MIL	1/5MIL	100yds VNM-1 MIL	5 levels R & G	
VIOC-02 _{SFP}	2-7x	32mm	16.0-4.6	63.7-18.2	80.0 / 3.15	234 / 9.2	328 / 11.6		20MIL	20MIL	1/10MIL			
VIOC-03 _{SFP}	3-9x	40mm	13.3-4.4	42.4-14.1		305 / 13.8	447 / 15.8		18MIL	18MIL				
VIOC-04 _{SFP}	4-12x		10.0-3.3	31.8-10.6	90.0 / 3.5	335 / 13.2	458 / 16.2							



SRD

RDSL27 | 1x20

3 MOA Dot Size

11 Levels **R**Quick Release Picatinny Mount
& Low Weaver Mount

T4

RDSL17 | 1x30

3 MOA Dot Size

11 Levels **R**

Riser & Low Picatinny Mount

T4

RDSL29 | 1x28

30 mm Tube

4 MOA Dot Size

5 Levels **G** & **R**

Cantilever Picatinny Mount

PRODUCT SPECS

SKU	Dot Size	Lens Dia	Eye Relief	Length (mm / in)	Weight (net) (g / oz)	Elevation Range	Windage Range	Click Value	Finish	Dot Intensity	Battery Type
RDSL27									Graphite		
		20mm		76 / 3.0	195 / 7.7	>45MOA	>45MOA				
RDSL28	3MOA								Black matte	11 levels R	
			Free					1MOA			CR2032
RDSL17		22mm		69 / 2.7	123 / 4.3	100MOA	100MOA				
									Black matte		
RDSL29	4MOA	30mm		125 / 4.9	200 / 7.1	80MOA	80MOA			5 levels R & G	



V2

RDSL01 | 1x18

3 MOA Dot Size
4 Levels R
20mm In Weaver Mount

V3

RDSL16 | 1x17x22

3.5 MOA Dot Size
6 Levels R
Switch on Side

RDSL18 | 1x17x22

3.5 MOA Dot Size
6 Levels R
Switch on Side

RDSL25 | 1x17x26

3.5 MOA Dot Size
6 Levels R
Switch on Side
Available In Weaver Mount



T1

RDSL06 | 1x30

5 MOA Dot Size
5 Levels G & R
Weaver mount

T1

RDSL05 | 1x35

5 MOA Dot Size
5 Levels G & R
Available In Weaver & Dovetail Mount

SRD

RDSL31 | SRD1x16x22 AUT

3 MOA Dot Size
Polymer Extreme Light
Automatic Light Sensor
50,000 Hours Runtime


PRODUCT SPECS

SKU	Dot Size	Lens Dia	Eye Relief	Length (mm / in)	Weight (net) (g / oz)	Elevation Range	Windage Range	Click Value	Footprint Mount Type	Dot Intensity	Battery Type
RDSL01	3MOA	18x22.5mm	Free	51 / 2.0	57 / 2.0	60MOA	60MOA	1MOA	TEK™	Auto Light Sensor	N/A
RDSL31	3MOA	16x22mm		40.8 / 1.6	12.4 / 0.44	>45MOA	>45MOA		MAG™	CR2032	
RDSL05	5MOA	35mm		110 / 4.3	160 / 5.6	80MOA	80MOA		Weaver Mount	5 levels R & G	
RDSL06	3MOA	30mm		116 / 4.6	137 / 4.8	60MOA	60MOA		11 levels R		
RDSL16	3.5MOA	17x22mm		53 / 1.9	TEK™	CR2032					
RDSL25	4MOA	17x26mm		46 / 1.8	53 / 1.9	80MOA	80MOA		MAG™	6 levels R	
RDSL18	3.5MOA	17x22mm		70 / 1.9	TEK™						




Z1 RDSL15 | 1x23x34

Multi-Reticle
5 Levels **G** & **R**
Weaver Mount



Z3 RDSL03 | 1x22x33

Multi-Reticle
Stepless **G** & **R**
Weaver Mount



Z4 RDSL26 | 1x22x34

Multi-Reticle
5 Levels **G** & **R**
Quick Release Picatinny Mount



PRODUCT SPECS

SKU	Dot Size	Lens Dia	Eye Relief	Length (mm / in)	Weight (net) (g / oz)	Elevation Range	Windage Range	Click Value	Finish	Dot Intensity	Battery Type
RDSL15	1x	23x34mm	Free	80 / 3.1	115 / 4.0	40MOA	40MOA	1MOA	Black matte	5 levels R & G	CR2032
RDSL20									Red		
RDSL23									FDE		
RDSL24									Black matte		
RDSL03	1x	22x33mm	Free	82 / 3.2	160 / 5.6	60MOA	60MOA	1MOA	Red	Stepless R & G	CR2032
RDSL21									FDE		
RDSL22									Black matte		
RDSL26	1x	23x34mm	Free	82 / 3.2	140 / 4.9				Black matte	5 levels R & G	LR754



VIMW-03

H: 30.5mm / 1.2in

VIMW-02

H: 25.4mm / 1in

VIMW-01

H: 22.5mm / 0.9in

25.4mm (1")
Weaver Rings

25.4mm (1")
Dovetail Rings



VIMD-01

H: 22.5mm / 0.9in

VIMD-02

H: 25.4mm / 1in

VIMD-03

H: 33.4mm / 1.3in



VIMW-13

H: 36mm / 1.4in

VIMW-12

H: 32mm / 1.25in

VIMW-11

H: 25.4mm / 1in

30mm
Weaver Rings

30mm
Dovetail Rings



VIMD-11

H: 27mm / 1.1in

VIMD-12

H: 30mm / 1.2in

VIMD-13

H: 36mm / 1.4in



BOSL01 | 8x42

BOSL02 | 10x42

Multi-Coated Lens
 Roof Prism, Coated Prism
 Center Focus

BINOCULAR

SKU	Magnification	Lens Dia	Type of Prism	Exit Pupil	Field of View	Size	Weight
BOSL01	8x	42mm	BAK7	5.2	6.3°	158x128,6x54mm	660g / 23,2
BOSL02	10x			4.0	5,8°		636g / 22,4



SSSL01 | 15-45x50

SSSL02 | 20-60x70

BAK7 Prism
 Center Focus
 Fully-Multi Coated
 Compact Lightweight


SPOTTING SCOPE

SKU	Magnification	Lens Dia	Type of Prism	Exit Pupil	Field of View	Weight
SSSL01	15-45x	50mm	BAK7 prism	3.4 - 1,15	2,6-1,26°	521g / 18,38oz
SSSL02	20-60x	70mm		3,55-1,2	2,45-1,26°	664g / 23,4oz



RFSL01 | 6x21

6-800 Yards Range
 Compact Size
 0.3S Responded Time
 Angle & Height Ranging




RANGE FINDER

SKU	Magnification	Lens Dia	Optical Structure	Ranging Distance	Angle Range	Field of view	Size	Weight
RFSL01	6x	21mm	Fully coated	116 / 4,6	- 70 to 70 degree	6°	98,5x77x37mm	125g / 4,4oz

SCOPE COLLIMATOR INSTRUMENT



Various Focal Length
 Red Dot & Optics
 25, 50 or 100 Yards

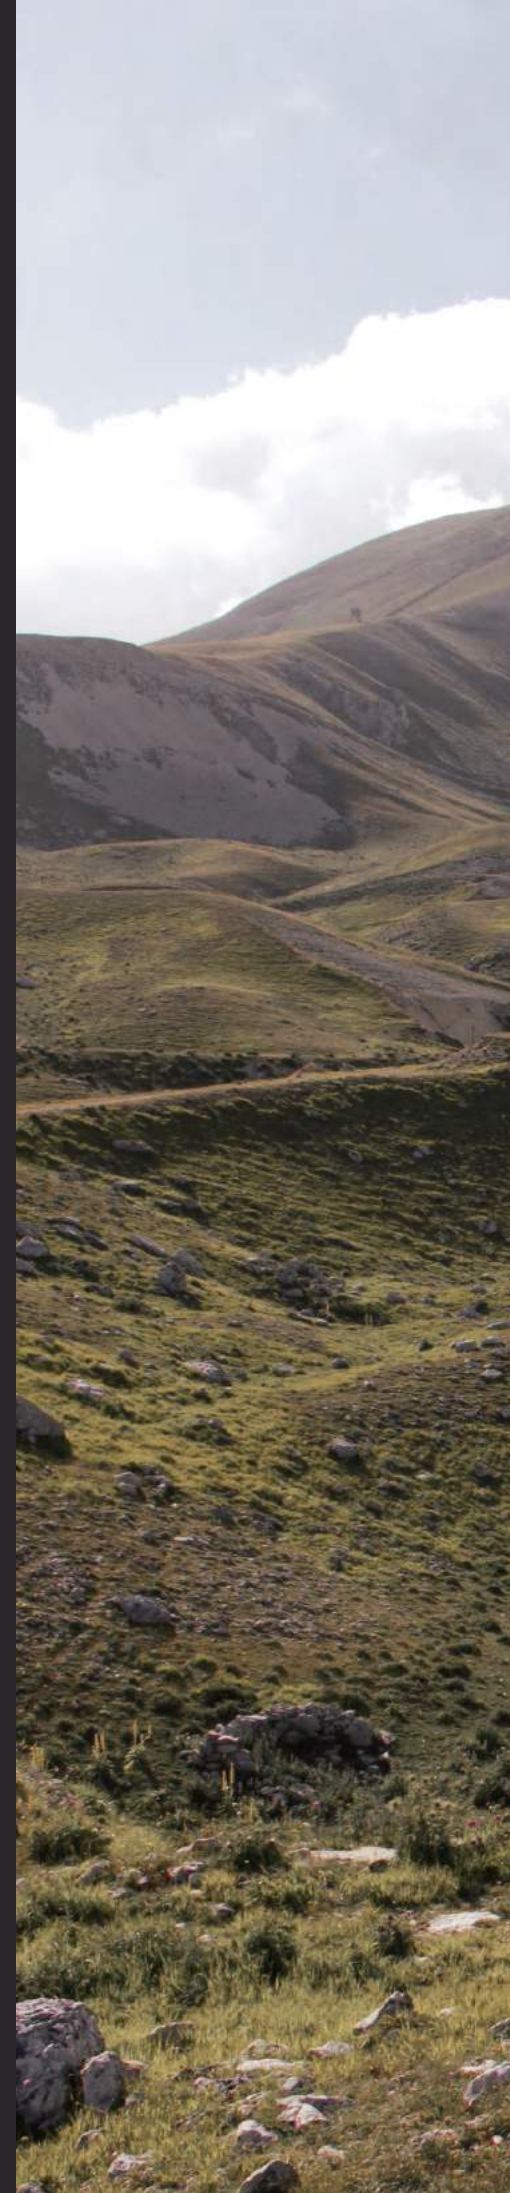






GUNPANY

Established In 2020 Is a Brand That Mainly Deals With The Products For Gun Cleaning, Maintenance, Installation And Supplementary.



SNAP CAPS

A snap cap is a device that is shaped like a standard firearms cartridge but contains no primer, propellant, or projectile.

It serves the same function as a dummy round but is different in that a dummy is usually made from a real cartridge with its propellant and primer removed (still has the projectile and the casing).



BENCH MAT



SCBM-01



SCBM-02



SCBM-04



SCBM-03

OTHERS



New
VeKey-1
SCTK-05
Stainless Steel
Torx Type: T10 and T6
Two Flat Screwdrivers



New
Torque Screwdriver
SCTK-04
Various Bits Made of Steel
In/Lb & N/M in Setting
Rubber Armor



Bolt Action Silicon Cover
SCOT-51



Double Mag Pouch
GPPD-01



Multi-Fit Holster
Right Hand Universal
GPHR-01



16 Pcs Boresighter Kit
GPBS-01



Bore Barrel Cleaning Rope
SCOT-46



Compact Gun Trigger Lock
SCOT-35

AND MORE.....

CLEANING KIT



○ 12GA Shotgun
SCCK-08

○ 410 Shotgun
SCCK-09

○ Airgun .177 & .22
SCCK-10

MORE MODELS FOR OPTIONS



27 Pcs Universal Gun Cleaning Kit
SCCK-01



19 Pcs Cleaning Kit
GPGC-A19B



AR15 / M4 Cleaning Kit Pouch
GPGC-A15P



3 Brushes 2 Picks
GPGC-3B2P



4 Double Side Picks
GPCK-4P



- Brass Rod
- Universal Handle
- Utility Cleaning Brush
- 6 Nylon Jags
- 2 Nylon Slotted-tips
- 3 Brass Adaptors
- Plastic Muzzle Guard
- 1 Pack of Cleaning Patches
- Bronze Brush
- Cotton Mop

62 Pcs Universal Gun Cleaning Kit | SCCK-20

BORE BARREL CLEANING ROPE



.223 / 5.56mm
SCCK-02



.308 / 7.62mm
SCCK-03



9mm
SCCK-04



12GA
SCCK-05



.45
SCCK-06



.270 / 7mm
SCCK-07



.22 LR
GPCL-22LR




.338
GPCL-338



12.7mm
GPCL-127



.408
GPCL-408



9mm Pistol
GPCL-P9

AND MORE.....



Rokstad

Mainly engaged in the brand of monopods, bipods
tripods, gun stocks and other auxiliary products



SHOOTING SYSTEM



BBS V Mount Tripod

RSGR-07 / RSGR-08



80cm 31" Folded | 188cm 74" Extended
Ball Bearing Socket Connector | QD Level Lock



KNE Shooting Stick

SCOT-12

1 M Height at Open Status | Kneeling Position
0.45 Meter Folded | 6063-T6 Alloy Aluminum



MAG V Mount Monopod

RSGR-01

84cm 33" Folded | 181cm 71" Extended
Magnetic QD Connector | Twist Lock



LIT V Mount Bipod

RSGR-05

65cm 25" Folded | 120cm 47" Extended
Twist Lock | 6063-T6 Alloy Aluminum



ELP V Mount Tripod

RSGR-06

20cm 7.9" Folded | 26cm 11.4" Rised
Twist Lock | 6063-T6 Alloy Aluminum



TPM Shooting Gun Rest

RSGR-12 (RSGR-07 & 08 Compatible)

V Mounts Made of Plastic & None-Slip Rubber
6061-T6 Aluminum Platform | 1/4"-20 Thread Bushing



New Shooting Rifle Rest Tripod Saddle Mount

RSGR-14 (RSGR-07 & 08 Compatible)

Grips And Hold Rifle In Wide 35-65mm (1.4-2.5")
Made from Aluminum Alloy | 1/4"-20 Thread Bushing

BINOCULAR REST



Binocular Rest Tray Mount BLK / WOD

RSBR-01 / RSBR-02



Made of Plastic and Nylon Polymer | None-Slip Base
Elastic Rubber Strap | 1/4"-20 Thread Bushing Fits
Nearly All Photographic Tripods

SHOOTING BIPOD



6-7" / 9-10.6" Universal

SCBPW-01 / SCBPW-02

Panning | Weaver Mount Base | Rubber Feet, Spring Eject | with Barral Mount Adapter



6-9" Swivel Spring Retractable

SCBPS-04

80cm 31" Folded | 188cm 74" Extended
Ball Bearing Socket Connector | QD Level Lock



9-13.5" Swivel Spring Retractable

SCBPS-05

9-13.5" Style | Sling Stud Connect with Weaver Mount Adapter



15-26" Swivel Spring Retractable

SCBPS-06

815-26" Style | 6 Levels Retractable Legs
Sling Stud Connect | with Weaver Mount Adapter



6-9" Spring Retractable

SCBPB-01

6-9" Style | Sling Stud Connect with Weaver Mount Adapter



9-13.5" Spring Retractable

SCBPB-02

9-13.5" Style | 6 Levels Retractable Legs
Sling Stud Connect | with Weaver Mount Adapter



Carbon Fiber 6-9" Swivel Spring Retractable

RSCFS-06

6-9" Height | Legs Made of Carbon Fiber
Swivel Sling Stud Clamp with Picatinny Mount Adapter



Carbon Fiber 9-13.5" Swivel Spring Retractable

RSCFS-09

9-13.5" Style | Sling Stud Connection
Legs Made of Carbon Fiber | 6 Levels Retractable Legs
with Picatinny Mount Adapter



Carbon Fiber 6-9" Spring Retractable

RSCFP-06

6-9" Style | Sling Stud Connect | Legs Made
6 Levels Retractable Legs | Spring Loaded
with Weaver Mount Adapter



Carbon Fiber 9-13.5" Spring Retractable

RSCFP-09

9-13.5" Style | Legs Made of Carbon Fiber
Sling Stud Connect | 6 Levels Retractable Legs
Spring Loaded, with Weaver Mount Adapter



Vaide

Small Body,
Great Power is
Vaide Flashlight!

PISTOL FLASHLIGHT

Compact Red Laser Flashlight

VAPLL-R01

500 Lumens

Strobe Feature

21mm Weaver Mount

3 Levels Brightness White LED

Smart-Sense Momentary on/off Switch



New



New

Compact Green Laser Flashlight
VAPLL-G01



New

Red Laser Flashlight
VAPLL-R02



New

Green Laser Flashlight
VAPLL-G02

SUBCOMPACT PISTOL FLASHLIGHT

VAPL-01

Compact Pistol Flashlight

VAPL-02

Compact Pistol Flashlight
FDE

VAPL-03

Pistol Flashlight

VAPL-04

Pistol Flashlight
FDE

SKU	Brightness Lumen	Brightness Mode	Dimensions	Laser Wavelength	Battery Runtime
VAPLL-R01	500 lumens High 200 lumens Medium 40 lumens Low	High Medium Low Strobe	Length : 55mm / 2.17in Width: 28mm / 1.10in Height: 38mm / 1.50in	630-660nm <5mW class 3A	Combo: 15min (high) >20min (medium) >1h (low)
VAPLL-G01				510-550nm <5mW class 3A	
VAPLL-R02			Length: 65mm / 2.56in Width: 28mm / 1.10in Height: 38mm / 1.50in	630-660nm <5mW class 3A	Combo: 35min (high) >45min (medium) >2h (low)
VAPLL-G02				510-550nm <5mW class 3A	
VAPL-01		Constant / Strobe	Length: 51mm / 1.90in Width: 28mm / 1.10in Height: 33mm / 1.30in	/	10Min (high) 35Min (medium) 4.5 hours (low)
VAPL-02					
VAPL-03			Length: 63mm / 2.5in Width: 28mm / 1.1in Height: 27mm / 1.1in		45Min (high) 55Min (medium) 3 hours (low)
VAPL-04					



ViperRay

BORE SIGHT

RED LASER | MADE OF BRASS



SCBCR-08

.300 Win



SCBCR-12

9.3x62mm



SCBCR-07

30-06



SCBCR-06

8mm



SCBCR-13

6.5x55mm



SCBCR-15

5.45x39mm



SCBCR-10

20 GA



SCBCR-09

7.62x54mm



SCBCR-02

12 GA



SCBCR-03

.223 Rem



SCBCR-04

.308Win



SCBCR-05

7.62x39mm



SCBCR-14

.40 S&w



SCBCR-11

9mm

AND MORE.....

LASER SIGHT

SUBCOMPACT | SMART-SENSOR | IPX4 WETER RESISTANT



VRRL-P01

Compact Red Laser



VRRL-P02

Compact Red Laser



VRGL-P01

Compact Green Laser



VRGL-P02

Compact Green Laser

VRRL-P03

Red Laser



VRRL-P04

Red Laser
FDE



VRGL-P03

Green Laser



VRGL-P04

Green laser
FDE



SKU	Power	Wavelength	Weight	Length	Battery
VRRL-P01	≤5mW Class IIIa	630-650nM	33g / 1.2oz	43.5mm / 1.7 inch	Build-in rechargeable lithium
VRRL-P02					
VRGL-P01		510-532nM	52g / 1.8oz	61mm / 2.4in	
VRGL-P02					
VRRL-P03		630-650nM	52g / 1.8oz	61mm / 2.4in	
VRRL-P04					
VRGL-P03		510-532nM	52g / 1.8oz	61mm / 2.4in	
VRGL-P04					
SCGL-01		532nM	135g / 4.7oz	120mm / 4.7in	CR123
SCGL-07			233g / 8.2oz	147mm / 5.7in	
SCRL-07		635-660nM IR 830-850nM	255g / 9.0oz	99mm / 3.9in	
SCGL-10					

SCGL-01
Green Laser Sight



SCRL-07
Red Laser / IR Laser Combo



SCGL-07
Green Laser Designator



SCGL-10
Green Laser / IR Laser Combo



AND MORE.....





X-ACCU

Focus On Scope Mounts And Rings And Aims To Provide
Higher Quality Products For All Shooting Enthusiasts

20MOA



SCOPE RINGS

1" Profile Picatinny Rings

XASR-3001 | Center Height 1.0" (25.4mm)

1.25" Profile Picatinny Rings

XASR-3002 | Center Height 1.25" (32mm)

1.4" Profile Picatinny Rings

XASR-3003 | Center Height 1.4" (35mm)

30mm



30mm

Dovetail Rings

Center Height 1.25" (32mm) / 1.5" (38mm)
XASR-3005 / XASR-3006



30mm

Cantilever Weaver Rings

Center Height 1.25" (32mm)
XASR-3016



30mm

Cantilever Dovetail Rings

Center Height 1.4" (36mm)
XASR-3017



30mm

One Piece Dovetail Mount

Center Height 1.1" (28mm)
XASR-3100 / XASR-F3100



30mm

0MOA / 20MOA

One Piece High Picatinny Mount

Center Height 1.4" (36mm)
XASR-3012 / XASR-3013



30mm

0MOA / 20MOA

One Piece Medium Picatinny Mount

Center Height 1.25" (32mm)
XASR-3010 / XASR-3011

SCOPE RINGS

1.1" Low Profile Picatinny Rings

SCTM-52 | Center Height 1.1" (28mm)

1.4" Medium Profile Picatinny Rings

SCTM-53 | Center Height 1.4" (36mm)

1.6" Profile Picatinny Rings

SCTM-54 | Center Height 1.6" (40mm)



34mm



34mm

0MOA / 20MOA

One Piece Medium Picatinny Mount

Center Height 1.4" (36mm)
SCTM-60 / SCTM-61



34mm

0MOA / 20MOA

One Piece High Picatinny Mount

Center Height 1.6" (40mm)
SCTM-57 / SCTM-58



Mount Assembly Kit

XASR-A01



34mm


0MOA / 20MOA

One Piece High Picatinny Mount


Center Height 1.6" (40mm)
XASR-3014 / XASR-3015

SCOPE RINGS


25.4mm



1" Profile Picatinny Rings
XASR-2501



1.25" Profile Picatinny Rings
XASR-2502



1.4" Profile Picatinny Rings
XASR-2503



30mm 0MOA

1-Piece Extended Picatinny AR Mount
XASR-3031 | Center Height 1.5" (38mm)



30mm 20MOA

1-Piece Extended Picatinny AR Mount
XASR-3032 | Center Height 1.5" (38mm)



30mm FDE 0MOA

1-Piece Extended Picatinny AR Mount Coyote
XASR-3035 | Center Height 1.5" (32mm)



30mm FDE 20MOA

1-Piece Extended Picatinny AR Mount Coyote
XASR-3036 | Center Height 1.5" (38mm)



30mm

Adjustable Picatinny Rings
Center Height 1.25-1.5" (32-38mm)
XASR-3040



30mm

Adjustable Dovetail Rings
Center Height 1.4-1.6" (35-41mm)
XASR-3045



34mm

Adjustable Picatinny Rings
Center Height 1.4-1.6" (36-41mm)
XASR-3050



34mm

Adjustable Dovetail Rings
Center Height 1.5-1.7" (37.5-43mm)
XASR-3055



25.4mm 1"

Adjustable Picatinny Rings
Center Height 1.2-1.4" (30-36mm)
XASR-2510



25.4mm 1"

Adjustable Dovetail Rings
Center Height 1.3-1.5" (33-39mm)
XASR-2515



30mm

Adjustable Cantilever Weaver Rings
Center Height 1.4-1.6" (35-41mm)
XASR-3060



30mm

Adjustable Cantilever Dovetail Rings
Center Height 1.4-1.6" (35-41mm)
XASR-3065

SCOPE WEAVER RINGS



0.8" Low Profile Rings

SCTM-27

1.0" Medium Profile Rings

SCTM-22

1.2" High Profile Rings

SCTM-08

1.4" Extreme High Profile Rings

SCTM-65



1.0" Medium Profile Rings

SCTM-37

1.14" High Profile Rings

SCTM-56

1.25" Extreme High Profile Rings

SCTM-64

SKU	Diameter	Width	Center Height	Weight(net)	Material
SCTM-65	30mm	16mm / 0.6in	35mm / 1.57in	137g / 4.8oz	6061-T6 Aluminum Alloy
SCTM-27			21mm / 0.83in	105g / 3.7oz	
SCTM-22			25.4mm / 1in	120g / 4.2oz	
SCTM-08			31mm / 1.2in	130g / 4.6oz	
SCTM-37	25.4mm / 1in	16mm / 0.6in	25.4mm / 1in	113g / 4.0oz	
SCTM-56			29mm / 1.14in	125g / 4.4oz	
SCTM-64			31.5mm / 1.25in		

STEEL SCOPE RINGS



25.4mm 1"



30mm

Low Profile Weaver Quick Release Rings

XASR-SQ01

Medium Profile Weaver Quick Release Rings

XASR-SQ02

High Profile Weaver Quick Release Rings

XASR-SQ03

High Profile Weaver Quick Release Rings

XASR-SQ13

Medium Profile Weaver Quick Release Rings

XASR-SQ12

Low Profile Weaver Quick Release Rings

XASR-SQ11

98K Turret Mount Ring
SCSR-07



30mm Flip to Side Picatinny Ring
SCSR-08



SKU(quick release)	Diameter	Width	Center Height	Weight (net)	SKU (standard)
XASR-SQ01	25.4mm / 1in	18mm / 0.7in	19mm / 0.75in	135g / 4.8oz	XASR-S01
XASR-SQ02			25.4mm / 1in	160g / 5.6oz	XASR-S02
XASR-SQ03			31.8mm / 1.25in	180g / 6.4oz	XASR-S03
XASR-SQ11	30mm		25.4mm / 1in	160g / 5.6oz	XASR-S11
XASR-SQ12			31.8mm / 1.25in	175g / 6.2oz	XASR-S12
XASR-SQ13			38.1mm / 1.5in	205g / 7.2oz	XASR-S13
SCSR-07	26.5mm	22mm / 0.9in	41mm / 1.6in	320g / 11.3oz	/
SCSR-08	30mm	40mm / 1.6in	38mm / 1.5in	212mm / 7.5oz	/

ANTI CANT DEVICE (ACD)



30mm One Piece
Weaver Mount
SCACD-23



Universal Flat
SCACD-19



30mm One Piece
Cosine Indicator
SCACD-24



Offset Bubble
Weaver Mount
SCACD-20



30mm One Piece
Dovetail Mount
SCACD-25



Offset Bubble
Dovetail Mount
SCACD-21



Turret Mark Reader
30mm / 34mm
SCTR-01 / 02



40mm Offset Bubble
SCACD-12



30mm Offset Bubble GenII
SCACD-26



34mm Offset Bubble GenII
SCACD-27



30mm One Piece
Cosine Indicator
SCACD-14



30mm One Piece
Dovetail Mount
SCACD-16



30 / 25.4mm Offset Bubble
With Top Rail
SCACD-07



Screw-in M4 Screw Holes
SCACD-22

TACTICAL PICATINNY MOUNT

30mm



Flip to Side Picatinny Ring

SCTM-17 | Center Height 1.4" (36mm)

30mm



One Piece Offset Picatinny Mount

SCTM-24A | Center Height 1.5" (38mm)

25.4mm 1"



One Piece Offset Picatinny Mount

SCTM-63 | Center Height 1.5" (38mm)

30mm



30mm Scope Tube Mount

SCTM-21 | Top rail length 1.8" (45mm)

30mm



20MOA Picatinny Mount

SCTM-39 | Center Height 1.25" (35mm)

30mm



One Piece Picatinny Mount

SCTM-36 | Center Height 1.25" (35mm)

30mm



One Piece Picatinny Mount TPR

SCTM-59 | Center Height 1.4" (36mm)

30mm



One Piece Offset Mount Ring XL

SCTM-24B | Center Height 1.5" (38mm)



OPTICS®



Vekt Defense



OTHERS



Swiss K31 Dovetail Mount
VDSM-10



Lee Enfield 303 Rail Mount
VDSM-11



Mosin-Nagant 91/30 PEM
VDSM-12



T3 Picatinny Steel Rail
SCTIK-01



2" / 4" / 5"
M-Model Rail Section
SCRAAM-52 / 53 / 54



2" / 4" / 5"
KeyMod Rail Section
SCRAAM-22 / 23 / 24



M-Model Rail Screws Kit
SCMLS



KeyMod Rail Screws Kit
SCKRS



Mosin-Nagant Seel Mount
SCRA-61



Lee Enfield Scope Mount
SCRA-66



R700 Steel Rail Bases
SCRA-69



98K Steel Rail Mount
SCRA-70



0MOA / 20MOA
138mm / 5.4" R700 Steel Rail Short
SCRA-64 / 65



0MOA / 20MOA
159mm / 6.25" R700 Steel Rail Long
SCRA-62 / 63



Riflescope Coat Cover (S / M / L / XL)
SCOT-44-1 / 44-2 / 44-3 / 44-4



Bright your night

NIGHT VISION

Digital Day & Night Vision



OWNV-02

5x32 Digital Day & Night Vision Monocular

Max 200-Meter Range in Dark
Digital 3x Zoom | Ease for Use
With IR Illumination
Photo and Video Recording
Compact Portable Palm-in-Hand Size



OWNV-10

1x18 Digital Day & Night Helmet Head Mounted HD

Max 200-Meter Range in Dark
Digital 3x Zoom | Black&White&Green
With IR Light
Focus Adjustment
WIFI | Video Recording



OWNVS-03

8x50mm HD NIGHT VISION SCOPE

Max 1000-Meter Range in Dark
IP68
Digital 8x Zoom
With IR Light
WIFI | Video Recording



Helmet Flip-up Mount Kit
OWNV-MT10



INTRODUCTION

MCC10 follows the design of traditional optical equipment. It is a small, lightweight, simple operation with a wide range of application scenarios for infrared handheld thermal imaging monoculars.

MCC10 Thermal scope has clear imaging and comfortable observation, suitable for medium distance and short-distance observation, It is an ideal equipment for outdoor night vision.

FEATURES AND BENEFITS

- Boot up in 2 seconds and ready to use.
- High-sensitivity self-developed infrared detector to accurately detect targets.
- Built-in laser indicator to locate the target easily.
- 1280x960 High Resolution LCOS Display.
- Screen to provide a comfortable observation.
- PIP mode to Highlight Target Clearly.
- Connect App via WIFI to share anytime.
- Support 8 hours super long operation time.
- IP66 Encapsulation, Rugged and Durable.

APPLICATION

- Outdoor
- Search & Rescue
- Wild Adventure
- Personal Security
- Law Enforcement
- Livestock Breeding

Handheld Thermal Imaging Monocular

	VEOT-MC01 MCC10	VEOT-MC02 MCX10	VEOT-MC03 MCX20	VEOT-MC04 MCX30
Detector Type	VOx			
Detector Resolution	256x192, 12 μm		400x300, 12 μm	
Detection Range	Human 400M Vehicle 1000M	Human 800M Vehicle 1800M	Human 1000M Vehicle 2400M	Human 1400M Vehicle 2800M
NETD	≤50mk		≤40mk	
Focal Length	10 mm; F1.0	19 mm; F1.0	25 mm; F1.1	35 mm; F1.0
Frame Rate	50 Hz			
Field of View	17.1°x13.0°	13.6°x10.3°	10.4°x7.9°	7.5°x5.6°
Focus	Electric		Manual	
Digital Zoom	1x, 2x		1x, 2x and 4x	
Optical Zoom	1.5x	1.9x	2.4x	3.4x
Battery Life	≥ 8 hours		≥ 7 hours	
Battery Type	Single, replaceable 18650 battery			
Display Type	0.4" FLCOS			
USB	Type C (USB 2.0 standard), supporting analog video and power supply			
Eyepiece	Monocular, exit pupil distance ≥12 mm, diopter adjustment: -4 to + 2			
Resolution	1280x960			
PIP	Upper left, upper middle, upper right, closed			
Eyepiece Zoom	13.8x			
Hot Spot Tracking	Available			
Color Palettes	Black hot, white hot, red hot, iron hot, blue hot			
Storage Temperature Range	-30 °C to 60 °C			
Language Settings	Chinese or English			
Vibration	10 Hz~150 Hz~10 Hz 0.15 mm (as per IEC60068 -2-6)			
Shock	30g at 11 ms half sine pulse (as per IEC60068 -2-27)			
Encapsulation	IP66			
Drop	1m			
Size (L × W × H)	130x40x70 mm		150x40x70 mm	
Weight	≤ 280g		≤ 350g	



INTRODUCTION

RSM50 thermal imaging riflescope retains the appearance of a traditional daylight scope and perfectly integrates latest premium thermal imaging technology.

The design of this scope accommodates long-term operating habits of hunters. RSM50 adopts high-sensitivity thermal detector with three different lens options of 25mm,35mm,50mm, and its 10 sets of zero calibration configuration make it convenient to switch between different instruments.

APPLICATION

○ Outdoor Observing

FEATURES AND BENEFITS

- HD OLED display, with 1x~8x smooth zoom, provides a comfortable visual experience.
 - 10 sets of zero calibration configurations can be saved.no need to recalibrate for different instruments.
 - Mounts on Standard 30 mm Scope Rings.
 - 10 kinds of reticles, 6 kinds of reticle colors, 10 grades of reticle brightness, for your selection.
 - Support photo and video, record wonderful moments at any time, easy to share.
 - 10 hours super long duration time.
- Law Enforcement

Thermal Riflelescope

THERMAL OPTICS

	VEOT-RS01 RSM450	VEOT-RS02 RSM420	VEOT-RS03 RSM43	VEOT-RS04 RSX20	VEOT-RS05 RSX30	VEOT-RS06 RSX50
Detector Type	400x300@17μm, VOx			640x480@12μm, VOx		
Spectral	8μm ~ 14μm					
NETD	≤50mk					
Focal Length	25mm	35mm	50mm	25mm	35mm	50mm
FOV	15.49°x11.65°	11.1°x8.33°	7.78 °x5.84°	17.46°x13.14°	12.52°x9.41°	8.78 °x6.59 °
Display Screen	Full-Color 0.39'OLED screen , 1024x768					
Eyepiece	Pupil distance of eyepiece 48mm , Eyepiece magnification 14x					
Digital Zoom	1x~4x (Smooth zoom)			1x~8x (Smooth zoom)		
Detection Range	Human 1400M Vehicle 3000M	Human 700M Vehicle 1700M	Human 1000M Vehicle 2400M	Human 1000M Vehicle 2400M	Human 1400M Vehicle 2800M	Human 2000M Vehicle 3300M
Internal Storage	16G					
Magnification	1.6x~6.4x	2.3x~9.2x	3.2x~12.8x	1.4x~11.2x	2.0x~16.0x	2.8x~22.4x
Frame Rate	50Hz					
Scene Modes	Enhance, highlight, natural					
Color Palettes	White hot, black hot, customized red hot, green hot, iron red, blue heat					
Wi-Fi/APP	Connect App (IOS & Android) via WIFI to realize remote control, live image and video transmission					
Compensation Modes	Scene compensation, shutter compensation, automatic compensation					
Zero Calibration	50m / 100m / 200m / 300m / 500m					
Gun Type Selection	10 sets of zero calibration configurations can be saved, no need to recalibrate for different instruments					
Reticle	10 reticle styles, 6 colors, 10 levels of brightness					
Others	Photo taking, video recording, hotspot tracking, stadia metric rangefinder					
Battery Type	1x internal battery + 1x external battery, rechargeable, change the external battery without power cut off					
Battery Operating Time	Battery continuous working time ≥ 10hrs					
USB	Type-C, It can supply external power and charge, and can read the data of memory card					
Operating Temperature	-30 °C ~ 50 °C (External power supply is required below -20°C)					
Storage Temperature	-45°C ~ 70°C					
Shock	500g / 1ms					
Vibration	10Hz ~ 150Hz ~ 10Hz 0.15mm IEC60068 -2-6					
IP Level	IP67					
Weight	930g	940g	950g	980g	980g	990g
Dimensions	367x107x69mm	377x107x69mm	367x107x69mm	367x107x69mm	377x107x69mm	377x107x69mm



INTRODUCTION

The 35mm thermal module is the center of the system with its 35mm lens system and 384x288px. The matrices are built using 12-um technology, which makes it possible to obtain a greater optical magnification without increasing the external dimensions of the device.

Based on VOx (vanadium oxide) technologies, with high thermal sensitivity, the 35 NETD performance ensures the detection of small temperature changes and excellent performance in harsh conditions. This increases the detection range of heat-contrast objects and enables substrate visibility.


FEATURES AND BENEFITS

- You will be able to see the target even in extreme surveillance conditions such as snow, rain, fog/high humidity and at high ambient temperatures (from 30 degrees Celsius).
- Frame refresh rate - 50 Hz.
- 4 different image display color palettes (hot white, hot red, hot black and hot iron).
- 3 sensor calibration modes — automatic, semi-automatic, manual.
- The sight has a compartment for 4 CR123A batteries or batteries of the same size. The device can operate from any number of installed batteries within the available 4 places, even from one battery.

Thermal Image Scope 3-IN-1: Riflescope/Monocular + Clip on

	VEOT-AD01 CO35 1x35mm	VEOT-AD02 CO50 1x50mm
Image Sensor	Uncooled Focal Plane Arrays	
Resolution	384x288	640x512
NETD	Less than 35 mK (25 °C, F#=1.0)	
Frame Rate	50 Hz	
Focal Length	35 mm	
Pixel Interval	12 μm	
Response Waveband	8 μm to 14 μm	
Detection Range	1800m	2600m
Field of View	7.5°x 5.7°	8.78 °x 7.03 °
Min. Focusing Distance	3.5m	5m
Aperture	F1.0	
Magnification	1x	
Display	1024x768, 0.39 inch, OLED	
Palettes	Black hot, white hot, red hot, fusion	
Eye Relief	10mm	
Storage Capacity	Built-in EMMC (64 GB)	
Picture-in-Picture	Yes	
Hot Spot	Yes	
Battery Type	Applicable type: CR123A, RCR123A	
Battery Operating Time	8 h (25 °C, with hotspot off)	6.5 h (25 °C, with hotspot off)
Type-C Power Bank	5 VDC, 2 A Supports external power supply	
Work Temperature/Humidity	-20 °C to 55 °C (-4 °F to 131°F)	
Protection Level	IP67	
Vibration & Shock	750 g / 1 ms	
Detection	179x68x63mm	192x76x69mm
Weight	532g without eyepiece and batteries	583g without eyepiece and batteries
Port	Type-C	

VECTOR OVERALL SALES MARKET SHARE

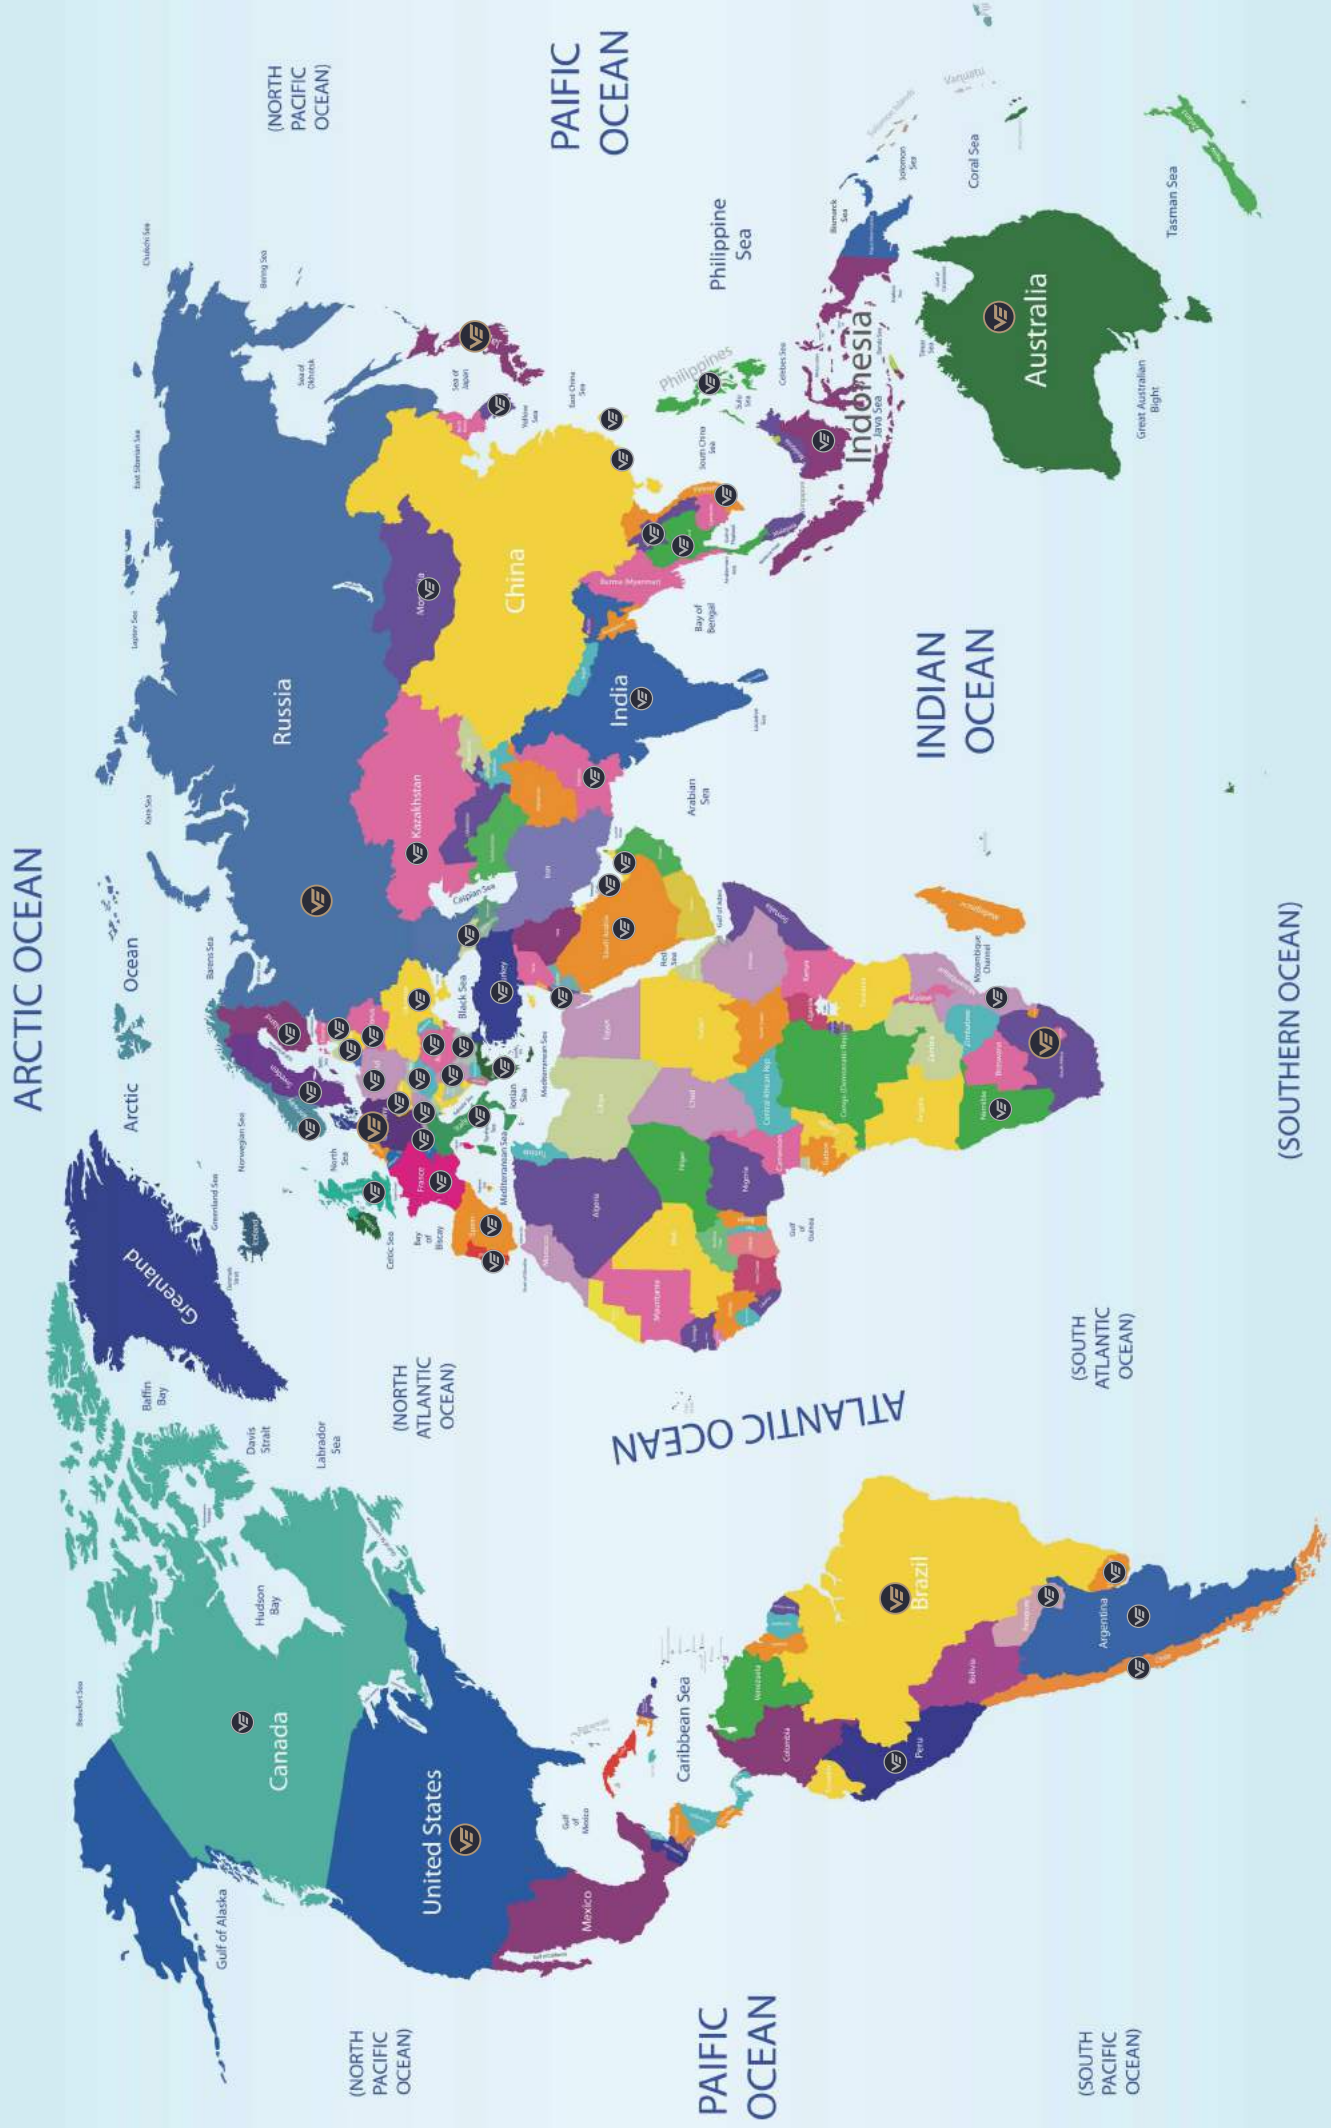



You Tube



WWW.VECTOROPTICS.COM



VECTOROPTICS®.com