

LIST NO: MM1



PARKER-HALE

SOUND MODERATOR .22 Calibre

This classic Sound Moderator has been in continuous production for over 50 years and has not been bettered. With sub-sonic ammunition it is the most efficient silencer available today.


Fit a Sound Moderator to your AIR RIFLE. Thread the muzzle or use a PH coupling AC286 to attach the MM1 to any of the popular muzzle adaptors available.

For effective silencing use sub-sonic ammunition. Supersonic bullets produce a 'crack' which cannot be suppressed. Remember you will hear the sound of the mechanism and the impact of the bullet even with sub-sonic cartridges. Revolvers will not be so effectively suppressed because of gas escape between cylinder and barrel. Some unlocked breech auto-loaders will be less efficiently suppressed than weapons which fire from a locked breech.

Advice on fitting:

Fits a 1/2" x 20 t.p.i. thread (1/2" long) which must be cut at the muzzle in accurate alignment

with the bore. When fitting to air rifles the threaded coupling AC286 may be used in conjunction with one of the proprietary adaptors available. The front sight may have to be removed or repositioned. Several manufacturers offer rifles pre-threaded for the P.H. Sound Moderator. Consult a gunsmith if in doubt.

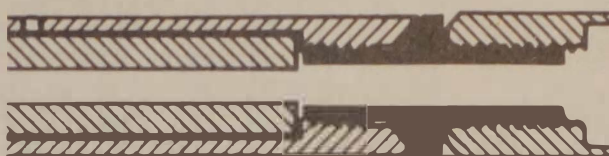


Coupling

When correctly fitted the Sound Moderator will not affect grouping but the sights may need re-zeroing as the muzzle weight can affect the mean point of impact.

Cleaning:

Powder residues will build up in the baffles and should be cleaned out regularly to maintain efficiency. Use the assembly rod provided to

extract and replace the stack of baffles, after removal of the knurled end cap.

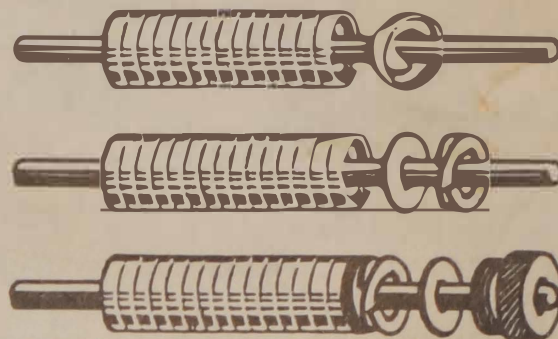

The Law

In the U.K. Sound Moderators fitted to .22 cartridge firing weapons, require a variation to the Firearm Certificate before purchase. Air rifle 'silencers' do not need a licence or certificate. Check with your local gun shop if in doubt about the regulations in your country.

Length: 175 mm (6.89") Weight: 200 g.

Attachment thread: 1/2 x 20 t.p.i. (U.S.) - thread length: 1/2"

SILENCIEUX Calibre .22


Ce silencieux, fabriqué sans interruption depuis plus de 50 ans, n'a jamais été surclassé. Avec des munitions de type "Sub-sonic", il est le silencieux le plus efficace actuellement disponible.

Adaptez un silencieux sur votre CARABINE A AIR. Filetez la bouche ou utilisez un coupleur PH AC286 pour fixer le MM1 à n'importe lequel des adaptateurs de bouche populaires disponibles.

Pour obtenir un effet efficace, utilisez des munitions "Subsonic". Des balles supersoniques produisent un claquement que l'on ne peut pas supprimer. Rappelez-vous que vous entendrez le bruit du mécanisme et de l'impact de la balle même avec des cartouches "Subsonic". L'effet sur un revolver ne sera pas aussi efficace en raison d'un échappement de gaz entre le barillet et le canon. Les automatiques à culasse non calée seront moins silencieux que des armes à culasse verrouillée.

Conseils de fixation:

S'adapte sur un filetage de 1/2" x 20 filets au pouce (longueur 12,5 mm) qui doit être usiné parfaitement dans l'axe du canon. Pour l'adaptation sur des carabines à air, le coupleur AC286 peut être utilisé conjointement à un des adaptateurs appropriés disponible. Il est possible qu'il faille enlever ou repositionner le guidon. Certains fabricants proposent des carabines pré-filetées pour le silencieux P.H. En cas de doute, consultez un armurier.

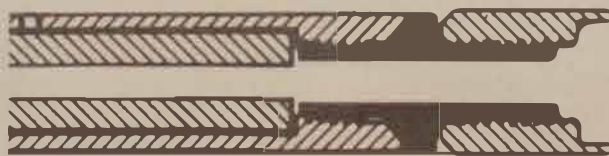


Coupleur

Lorsque le silencieux est correctement adapté, il ne modifiera pas le groupement mais il est possible que les organes de visée nécessitent un nouveau réglage étant donné que le poids à la bouche peut modifier le point d'impact.

Nettoyage:

Des résidus de poudre s'accumulant dans les chicanes, il faudra effectuer un nettoyage régulier afin de maintenir l'efficacité du silencieux. Utilisez la tige d'assemblage fournie pour l'extraction et la remise en place de l'empilage de chicanes après avoir enlevé le bouchon moleté.

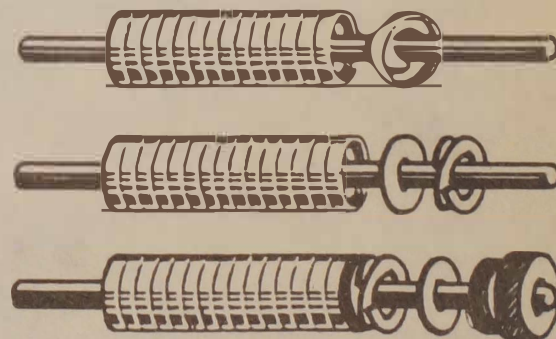

Longueur: 175 mm (6.89") Poids: 200 g.

Filetage de fixation: 1/2" x 20 filets au pouce (US) - longueur filetage 1/2" (12,5 mm).

